



## Droop Control Methods for PV-Based Minigrids

Opiyo, N. (2018). *Droop Control Methods for PV-Based Minigrids*. Poster session presented at 35th European Photovoltaic Solar Energy Conference, Brussels, Belgium.

[Link to publication record in Ulster University Research Portal](#)

### Publication Status:

Published (in print/issue): 24/09/2018

### Document Version

Publisher's PDF, also known as Version of record

### General rights

The copyright and moral rights to the output are retained by the output author(s), unless otherwise stated by the document licence.

Unless otherwise stated, users are permitted to download a copy of the output for personal study or non-commercial research and are permitted to freely distribute the URL of the output. They are not permitted to alter, reproduce, distribute or make any commercial use of the output without obtaining the permission of the author(s).

If the document is licenced under Creative Commons, the rights of users of the documents can be found at <https://creativecommons.org/share-your-work/ccllicenses/>.

### Take down policy

The Research Portal is Ulster University's institutional repository that provides access to Ulster's research outputs. Every effort has been made to ensure that content in the Research Portal does not infringe any person's rights, or applicable UK laws. If you discover content in the Research Portal that you believe breaches copyright or violates any law, please contact [pure-support@ulster.ac.uk](mailto:pure-support@ulster.ac.uk)

# Droop Control Methods for PV-Based Minigrids

## Introduction:

Droop control method is the most widely used in PV power systems to enable automatic load sharing between different distributed PV systems and to extend operating range of active (P) and reactive (Q) power ratings of a given inverter [1,2]. For easy analysis, consider a two bus synchronous generator connected to a high voltage (HV) transmission network as shown below.

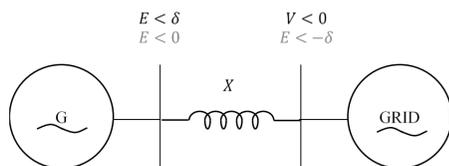


Fig. 1: Generator Connected to Grid

The power produced at the generator terminal is expressed as [3]

$$P = \frac{E}{R^2 + X^2} [XV \sin \delta + R(E - V \cos \delta)]$$

$$Q = \frac{E}{R^2 + X^2} [-RV \sin \delta + X(E - V \cos \delta)]$$

where  $\delta$  is the voltage angle.

## Methodology:

Consider a communal grid with two-feeder distribution systems as shown in figure 2 below.

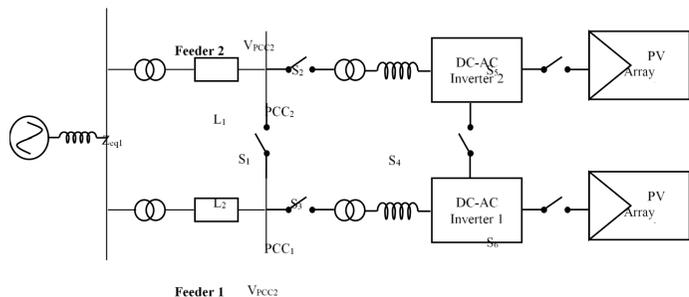


Fig. 2: Interline-PV (I-PV) System Configuration

Figure 3 shows a Thevenin equivalent of feeder 2 connected to inverter 2. The figure represents a power source ( $E_{PV} \angle \phi$ ) where  $Z_{th}$  represents the feeder as well as inverter coupling impedance,  $\phi$  is the phase angle difference between PCC and grid voltages, while  $\theta$  is the impedance angle due to  $Z_{th}$ .

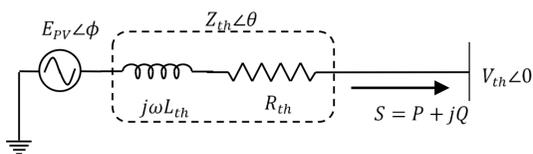


Fig. 3: Thevenin Equivalent Circuit of Feeder 2 Connected to Inverter 2

The following equations are used to control the active and reactive power flows ( $S = P + jQ$ ) from inverter 2 (the power source) to feeder 2 (the grid):

$$P = \frac{V_{th}}{Z_{th}} [(E_{PV} \cos \phi - V_{th}) \cos \theta + E_{PV} \sin \phi \sin \theta]$$

$$Q = \frac{V_{th}}{Z_{th}} [(E_{PV} \cos \phi - V_{th}) \sin \theta - E_{PV} \cos \phi \sin \theta]$$

## Results and Discussion:

Figure 4 shows the performance of feeder 2 at  $t_1$ ,  $t_2$ , and  $t_3$ . The PCC voltage is regulated according to the P-f droop control method. The droop coefficient for this method is  $0.02 \mu\text{u}/\text{MW}$  for all the operating conditions.

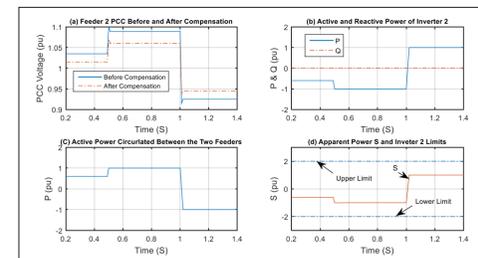


Fig. 4: Feeder 2 Performance Using P-f Droop Control Method

Figure 5 shows the performance of feeder 2 at  $t_1$ ,  $t_2$ , and  $t_3$  with Q-V droop control method. The droop coefficient for this method is  $0.01 \mu\text{u}/\text{MVAR}$  for all the operating conditions.

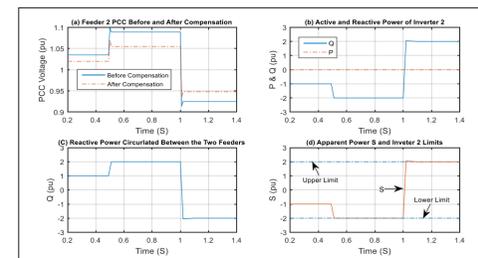


Fig. 5: Feeder 2 Performance Using Q-V Droop Control Method

Figure 6 shows the performance of feeder 2 at  $t_1$ ,  $t_2$ , and  $t_3$  with P-Q-V droop control method. The inverter capacity is efficiently utilized for voltage regulation with the P-Q-V method than with P-f or Q-V droop methods individually.

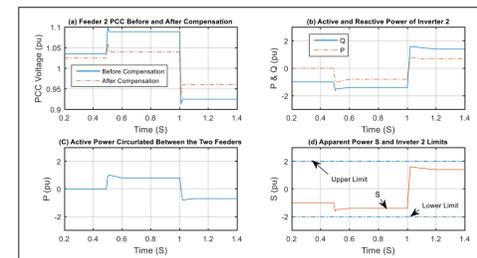


Fig. 6: Feeder 2 Performance Using P-Q-V Droop Control Method

## Conclusion:

Active power-frequency (P-f) droop control method is the most efficient for low voltage transmission networks with low X/R ratios while reactive power-voltage (Q-V) droop control method is the most efficient for systems with high X/R ratios. Results also show that P-f or Q-V droop control methods cannot individually efficiently regulate line voltage and frequency that for systems with complex line resistances and impedances, i.e. near unity X/R ratios. For such systems, P-Q-V droop control method, where both active and reactive power could be used to control PCC voltage via shunt-connected inverters, is determined to be the most efficient control method.

Results also show that shunt-connection of inverters leads to improved power flow control of interconnected communal grids by allowing feeder voltage regulation, load reactive power support, reactive power management between feeders, and improved overall system performance against dynamic disturbances.

**Acknowledgement:** This research was funded by Leeds International Research Scholarship