



Girli Concrete Derry playhouse folded frieze

Belford, P., & Morrow, R. (2009). Girli Concrete Derry playhouse folded frieze. Artefact, .
<http://www.derryplayhouse.co.uk/>

[Link to publication record in Ulster University Research Portal](#)

Publication Status:

Published (in print/issue): 30/01/2009

General rights

The copyright and moral rights to the output are retained by the output author(s), unless otherwise stated by the document licence.

Unless otherwise stated, users are permitted to download a copy of the output for personal study or non-commercial research and are permitted to freely distribute the URL of the output. They are not permitted to alter, reproduce, distribute or make any commercial use of the output without obtaining the permission of the author(s).

If the document is licenced under Creative Commons, the rights of users of the documents can be found at <https://creativecommons.org/share-your-work/licenses/>.

Take down policy

The Research Portal is Ulster University's institutional repository that provides access to Ulster's research outputs. Every effort has been made to ensure that content in the Research Portal does not infringe any person's rights, or applicable UK laws. If you discover content in the Research Portal that you believe breaches copyright or violates any law, please contact pure-support@ulster.ac.uk



- (51) **International Patent Classification:**
B28B 19/00 (2006.01) *B28B 23/00* (2006.01)
- (21) **International Application Number:**
PCT/EP2010/001311
- (22) **International Filing Date:**
3 March 2010 (03.03.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
0903678.1 4 March 2009 (04.03.2009) GB
0915113.5 1 September 2009 (01.09.2009) GB
- (71) **Applicant (for all designated States except US):** UNIVERSITY OF ULSTER [GB/GB]; Cromore Road, Coleraine, County Londonderry, BT52 1SA (GB).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** BELFORD, Patricia Clare [GB/GB]; 2a Irwin Avenue, Belfast, Northern Ireland BT4 3AF (GB). MORROW, Ruth Ellen [GB/GB]; 1 Cregagh Park, Belfast, Northern Ireland BT6 9LF (GB).
- (74) **Agents:** WALLER, Stephen et al.; FRKelly, 4 Mount Charles, Belfast, BT7 1NZ, Northern Ireland (GB).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) **Title:** COMPOSITE CONCRETE ARTICLE AND METHOD OF MANUFACTURE THEREOF

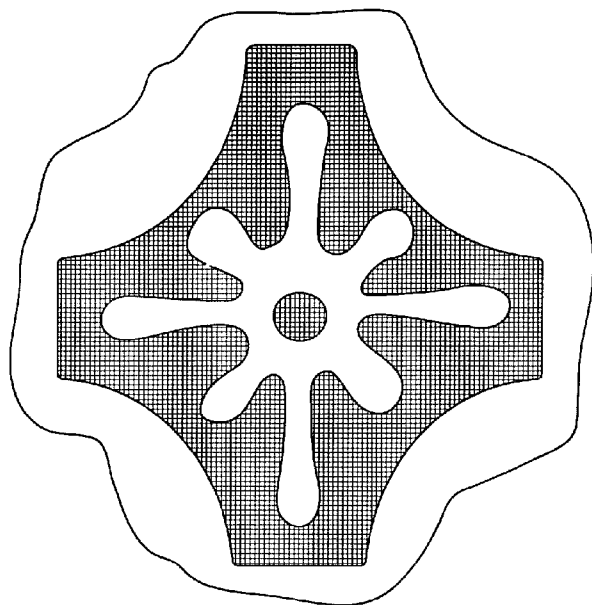


Figure 1

(57) **Abstract:** A method of manufacturing a composite concrete article comprising affixing at least one layer of textile to a base layer and incorporating the base layer into a body of wet uncured concrete such that the base layer becomes embedded in the concrete, whereby at least a portion of the at least one textile layer defines at least a portion of a surface of the cured concrete article with the base layer embedded within the concrete to anchor the textile layer to the concrete.

WO 2010/099945 A1

- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Composite concrete article and method of manufacture thereof

This invention relates to a composite concrete article and method of manufacture thereof, and in particular to a concrete article having textile structures integrated into the surface of the concrete to provide a novel aesthetic and/or functional surface finish and to a method of manufacturing such a composite concrete article.

Concrete is a composite material that consists essentially of a binding medium within which are embedded particles or fragments of aggregate, usually a combination of fine aggregate and coarse aggregate. In Portland-cement concrete, the binder is a mixture of Portland cement and water, with or without admixtures. Concrete may be reinforced, for example by means of fibres, such as glass fibres, or by metallic wires, rods or mesh, Such reinforcing materials being incorporated into the concrete prior to curing.

Concrete is commonly utilised as a construction material due to its low cost, ease of prefabrication into desired shapes and strength. However, concrete structures have a cold, hard and unattractive surface finish with poor acoustic properties.

An object of the present invention is to improve one or more of the appearance, thermal experience and/or acoustic properties of concrete by integrating textile structures into concrete articles such that at least portions of the textile structures define at least a portion of the exposed surfaces of the articles.

Prior art attempts to adhere textile materials to the surface of concrete articles have mainly been focussed on applying or imprinting such materials to the surface of the finished concrete articles. Few attempts have been made to integrate textile materials into concrete articles, mainly due to the harsh environment posed by uncured concrete (highly alkaline) and the difficulty in adhering a textile material to the concrete structure in a manner such that the textile material will not simply peel or scrape off the concrete once it has set or be subsumed by the concrete during the casting process.

According to the present invention there is provided a method of manufacturing a composite concrete article comprising affixing at least one layer of textile to a base layer and incorporating the base layer into a body of wet uncured concrete such that the base layer becomes embedded in the concrete, whereby at least a portion of the at least one textile layer defines at least a portion of a surface of the cured concrete article with the base layer embedded within the concrete to anchor the textile layer to the concrete.

Preferably the base layer comprises a porous fabric. More preferably the base layer comprises a mesh or apertured sheet or cloth through which the uncured concrete flows. Preferably the base layer comprises a polymeric mesh. In one embodiment the base layer comprises a polyester or nylon mesh. Such mesh may be of the type used for screen printing.

The method may comprise affixing the at least one textile layer to the base layer by means of an adhesive, such as a laminating film.

- 5 In one embodiment, the at least one textile layer is bonded to the laminating film before said textile layer is applied to the base layer by means of said laminating film.

A pattern may be formed in the at least one textile layer, for example by means of laser cutting or ablation or a chemical etching process. Where the textile layer is bonded to the base layer via a
10 laminating film, the pattern may be formed after the textile layer has been bonded to the laminating film and before the textile layer has been affixed to the base layer.

Alternatively, or additionally, the method may include the step of forming stitched visual and/or textural effects in the textile layer and/or stitching or bonding additional materials onto the textile
15 layer to create different visual and/or textural effects on the surface of the finished product.

In one embodiment the textile layer comprises a layer of flock adhesively secured to the base layer before the base layer is incorporated into the layer of concrete. Flocking is the application of fine particles, typically nylon fibres, to adhesive coated surfaces. The method may comprise applying
20 adhesive to the base layer, for example by a screen printing process, and applying flock onto the adhesive layer to bond the flock to the base layer, for example by electrostatic spraying of fine particles of flock onto the adhesive layer. The adhesive may be applied to the base layer in a desired pattern, for example by a screen printing process.

25 In one embodiment the at least one textile layer affixed to the base layer and the resultant laminate is placed in a mould with the textile layer in contact with a face of the mould and uncured concrete is poured into the mould such that the concrete flows into the base layer to anchor the textile layer to the concrete.

30 The method may comprise affixing two or more textile layers to the base layer. Said two or more layers may be at least partially superimposed upon one another or may be located adjacent each other to form a desired visual and/or textural effect. Said two or more textile layers may be formed from different materials and/or comprise different textures or patterns and/or may be applied to the base layer by two or more different processes.

35

According to a further aspect of the present invention there is provided a composite concrete article comprising at least one textile layer defining at least a portion of a surface of the article, said at least one textile layer being affixed to a base layer, said base layer being embedded within the concrete to anchor the at least one textile layer to the concrete.

40

Preferably the base layer comprises a mesh. In one embodiment the base layer comprises a polymeric mesh, in particular a nylon or polyester mesh.

The at least one textile layer may be bonded to the base layer by a suitable adhesive, such as a
5 laminating film.

In one embodiment the at least a portion of the textile layer may comprise flock.

In one embodiment the or at least one of the textile layers may comprise woven linen or any other
10 suitable alkaline resistant textile material.

The textile layer may comprise cut out sections defining a desired visual and/or textural effect in the surface of the finished article.

15 Stitched patterns may be formed in the textile layer and/or additional materials may be stitched or bonded onto the textile layer or directly to the base layer to create different visual and/or textural effects on the surface of the finished product.

Two or more textile layers may be affixed to the base layer, either at least partially superimposed
20 upon one another or located adjacent one another to form a desired visual and/or textural effect. The two or more textile layers may be formed from different materials and/or comprise different colours and/or textures to create the desired visual and/or textural effect.

An embodiment of the present invention will now be described, by way of example only, with
25 reference to the accompanying drawings, in which:-

Figure 1 is a view of a concrete article in accordance with an embodiment of the present invention;

Figure 2 is a view of a concrete article in accordance with a further embodiment of the present
30 invention; and

Figure 3 is a view of a concrete article in accordance with a further embodiment of the present invention.

35 A method of manufacturing a composite concrete article in accordance with an embodiment of the present invention comprises initially bonding one or more textile layers, in this example a layer of woven linen cloth, onto a laminating film by pressing the layers together for around two minutes at a temperature of about 140°C until the laminating film melts and bonds the layers together. Whilst the described embodiment utilises linen cloth, it is envisaged that numerous and varied textile materials
40 and structures may be used.

A pattern may then be formed in the linen cloth by laser cutting the fabric to remove sections of the fabric to create the desired visual and/or textural effect. Typically a pattern may be created whereby approximately 50% of the original linen material is cut away. The linen cloth is then bonded to base layer comprising a sheet of nylon mesh by means of the laminating film. The mesh may be formed
5 from monofilament nylon, for example formed from Bobbinet Nylon White PW34 having a weight of 136 grams per square metre.

It is envisaged that alternative adhesives may be used to bond the textile layer or layers to the base layer, for example a spray or brush on adhesive may be used instead of a laminating film.

10

The laminated sheet of fabric (i.e. the linen cloth) and mesh is then placed into a mould, with the fabric layer face down, and uncured concrete is poured into the mould on top of the sheet. The concrete flows into and penetrates the mesh but not the linen attached thereto.

15 Once cured, the concrete article is removed from the mould. The mesh base layer remains embedded within the concrete while the fabric layer remains on the surface of the concrete to define a surface pattern on the concrete article. The mesh anchors the fabric to the concrete to integrate the fabric layer into the concrete.

20 In the embodiment shown in Figure 1, the linen cloth is cut to define an architectural motif within a border and bonded to a mesh base layer to define a laminated sheet which is then integrated into a concrete panel by placing the laminated sheet within a mould with the linen cloth layer facing downwards and pouring uncured concrete over the laminated sheet. The concrete flows into the base layer such that the base layer becomes embedded with the concrete.

25

As shown in Figure 1, the concrete flows through the mesh layer such that the mesh layer becomes embedded within the concrete. In the regions where the linen cloth layer has been cut away, the concrete surface is exposed. However, in the regions where the linen cloth layer remains, the linen cloth remains on the surface of the concrete, forming the desired visual or textural effect.

30

A wide variety of textile structures having differing patterns, textures and shapes can be integrated into the surface of the concrete, utilising the mesh to anchor the textile material to the concrete. A linen sheet may be affixed to the mesh base layer and a pattern of stitching may be formed on the linen sheet to create a desired decorative effect.

35

In one embodiment, a sheet of fabric may be anchored to the entire surface of the concrete panel by means of a polyester or nylon mesh base layer, such that the fabric sheet defines the outer surface of the composite concrete panel to provide a construction material with enhanced or specific acoustic properties.

40

As shown in Figure 2, additional visual and textural effects may be created by stitching or bonding further textiles, threads or additional materials onto the fabric layer.

While woven linen fabric is described in the abovementioned embodiment, other textile materials and structures may be used, provided they are able to withstand the strong alkaline environment of the uncured concrete.

In a further embodiment, as shown in Figure 3, a layer of flock, for example nylon fibres, may be applied to a polyester or nylon base layer by a flocking process. The base layer may comprise a polyester mesh having between 5 and 30 threads per cm, more preferably between 10 to 20 threads per cm. A layer of adhesive may be applied to the base layer using a screen printing process before flock is applied to the adhesive using an electrostatic spraying process, as is common in known flocking processes, to achieve a specific pattern of flock on the base layer. A number of layer of different layers or regions of flock, of differing fibre size and/or colour, may be applied to the base layer to create a desired visual and/or textural effect or surface finish.

Once the flocking process has been completed to create the desired fabric layer on the base layer the base layer, is then integrated into a concrete panel by placing the base layer within a mould, with the flock layer facing the bottom of the mould, and uncured concrete is poured over the base layer. The concrete flows into the base layer such that the base layer becomes embedded with the concrete with the flock layer forming at least a portion of an external surface of the concrete.

A number of fabric layers, comprising a number of layer or patterns of different colours and/or sizes of flock may be applied to the base layer, and/or a number of woven or stitched fabric layer, to obtain any desired surface finish or visual and/or textural effect upon the surface of the finished concrete article.

The invention is not limited to the embodiment(s) described herein but can be amended or modified without departing from the scope of the present invention.

Claims

1. A method of manufacturing a composite concrete article comprising affixing at least one layer of textile to a base layer and incorporating the base layer into a body of wet uncured concrete
5 such that the base layer becomes embedded in the concrete, whereby at least a portion of the at least one textile layer defines at least a portion of a surface of the cured concrete article with the base layer embedded within the concrete to anchor the textile layer to the concrete.
2. A method as claimed in claim 1, wherein the base layer comprises a porous fabric.
10
3. A method as claimed in claim 1, wherein the base layer comprises a mesh or apertured sheet or cloth through which the uncured concrete flows.
4. A method as claimed in claim 3, wherein the base layer comprises a polymeric mesh.
15
5. A method as claimed in claim 4, wherein the base layer comprises a polyester or nylon mesh.
6. A method as claimed in any preceding claim, wherein the at least one textile layer is affixed
20 to the base layer by means of an adhesive.
7. A method as claimed in claim 6, wherein the at least one textile layer is affixed to the base layer by means of a laminating film.
- 25 8. A method as claimed in claim 7, wherein the at least one textile layer is bonded to the laminating film before said textile layer is applied to the base layer by means of said laminating film.
9. A method as claimed in any preceding claim, wherein a pattern is formed in at least a portion of the at least one textile layer.
30
10. A method as claimed in claim 9, wherein said pattern is formed by laser cutting or ablation or a chemical etching process.
11. A method as claimed in claim 9 or claim 10 wherein said pattern is formed in the at least one
35 textile layer before the base layer is incorporated into said body of wet uncured concrete.
12. A method as claimed in any preceding claim, further comprising the step of forming stitched patterns in the at least one textile layer and/or stitching or bonding additional materials onto the at least one textile layer to create different visual and/or textural effects on the surface of the finished
40 product before the base layer is incorporated into said body of wet uncured concrete.

13. A method as claimed in any preceding claim, wherein at least a portion of said at least one textile layer comprises a layer of flock adhesively secured to the base layer before the base layer is incorporated into said body of wet uncured concrete.
- 5 14. A method as claimed in claim 13, wherein the method comprises applying adhesive to the base layer and applying flock onto the adhesive layer to bond the flock to the base layer, for example by electrostatic spraying of fine particles of flock onto the adhesive layer.
15. A method as claimed in claim 14, wherein the adhesive is be applied to the base layer in a
10 particular pattern, for example by a screen printing process.
16. A method as claimed in any preceding claim, wherein the at least one textile layer affixed to the base layer and the resultant laminate is placed in a mould with the textile layer in contact with a face of the mould and uncured concrete is poured into the mould such that the concrete flows into
15 the base layer to anchor the textile layer to the concrete.
17. A method as claimed in any preceding claim, comprising affixing two or more textile layers to the base layer.
- 20 18. A method as claimed in claim 17, wherein said two or more layers may be at least partially superimposed upon one another or located adjacent each other to form a desired visual and/or textural effect.
19. A method as claimed in claim 17 or claim 18, wherein said two or more textile layers are
25 formed from different materials and/or comprise different textures or patterns and/or are applied to the base layer by two or more different processes.
20. A composite concrete article comprising at least one textile layer defining at least a portion of a surface of the article, said at least one textile layer being affixed to a base layer, said base layer
30 being embedded within the concrete to anchor the at least one textile layer to the concrete.
21. A composite concrete article as claimed in claim 20, wherein the base layer comprises a mesh.
- 35 22. A composite concrete article as claimed in claim 21, wherein the base layer comprises a polymeric mesh.
23. A composite concrete article as claimed in claim 22, wherein said base layer comprises a nylon or polyester mesh.

24. A composite concrete article as claimed in any of claims 20 to 23, wherein the at least one textile layer is bonded to the base layer by a suitable adhesive.
25. A composite concrete article as claimed in claim 24, wherein the at least one textile layer is
5 bonded to the base layer by a laminating film.
26. A composite concrete article as claimed in any of claims 20 to 25, wherein the at least a portion of the textile layer comprises flock.
- 10 27. A composite concrete article as claimed in any of claims 20 to 26, wherein at least one of the textile layers may comprise woven linen or any other suitable alkaline resistant textile material.
28. A composite concrete article as claimed in any preceding claim, wherein at least a portion of
15 at least one of the textile layer comprise cut out sections defining a desired pattern or other visual and/or textural effect in the surface of the finished article.
29. A composite concrete article as claimed in any of claims 20 to 28, wherein stitched patterns
20 are formed in the at least one textile layer and/or additional materials is stitched or bonded onto the at least one textile layer, or directly to the base layer, to create a desired visual and/or textural effects on the surface of the finished product.
30. A composite concrete article as claimed in any of claims 20 to 29, wherein two or more
25 textile layers are affixed to the base layer, either at least partially superimposed upon one another or located adjacent one another to form a desired visual and/or textural effect.
31. A composite concrete article as claimed in claim 30, wherein said two or more textile layers
30 are formed from different materials and/or comprise different colours and/or textures to create the desired visual and/or textural effect.

1 / 2

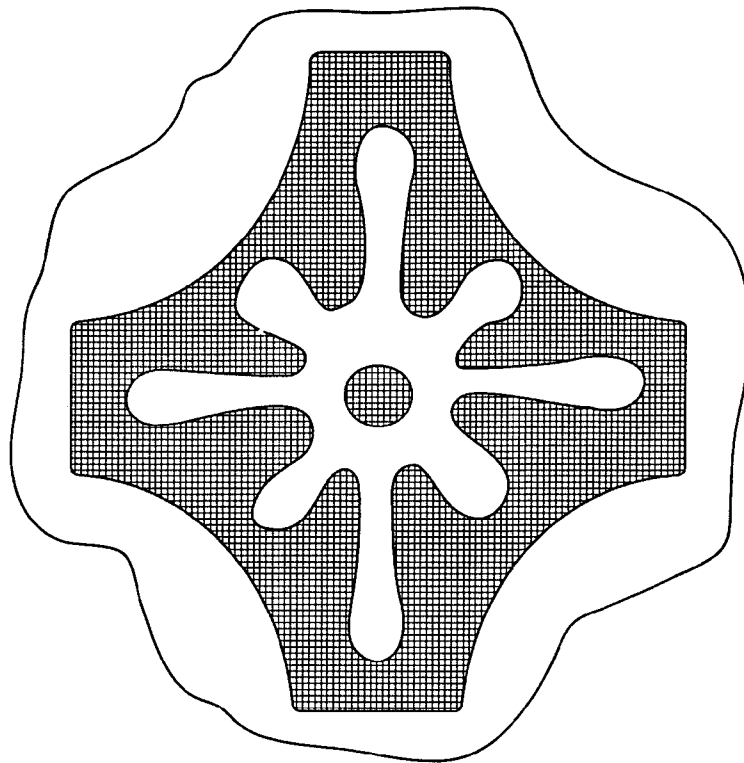


Figure 1

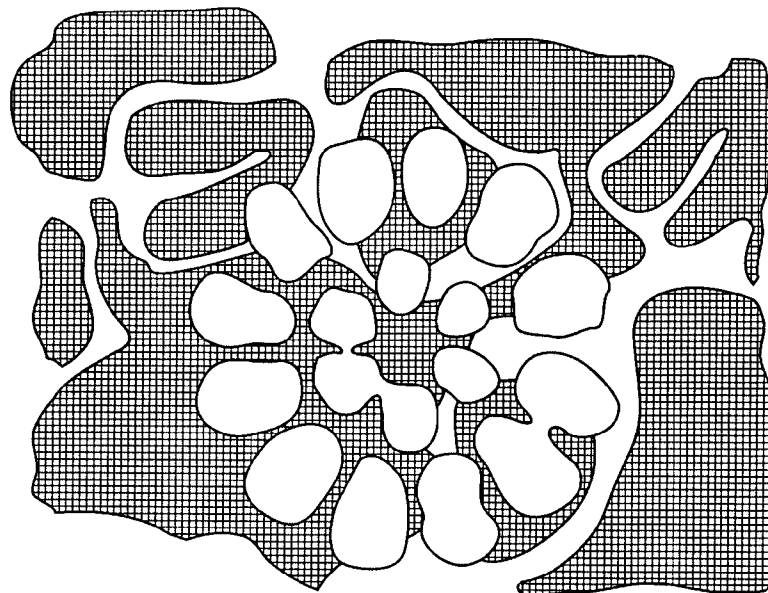


Figure 2

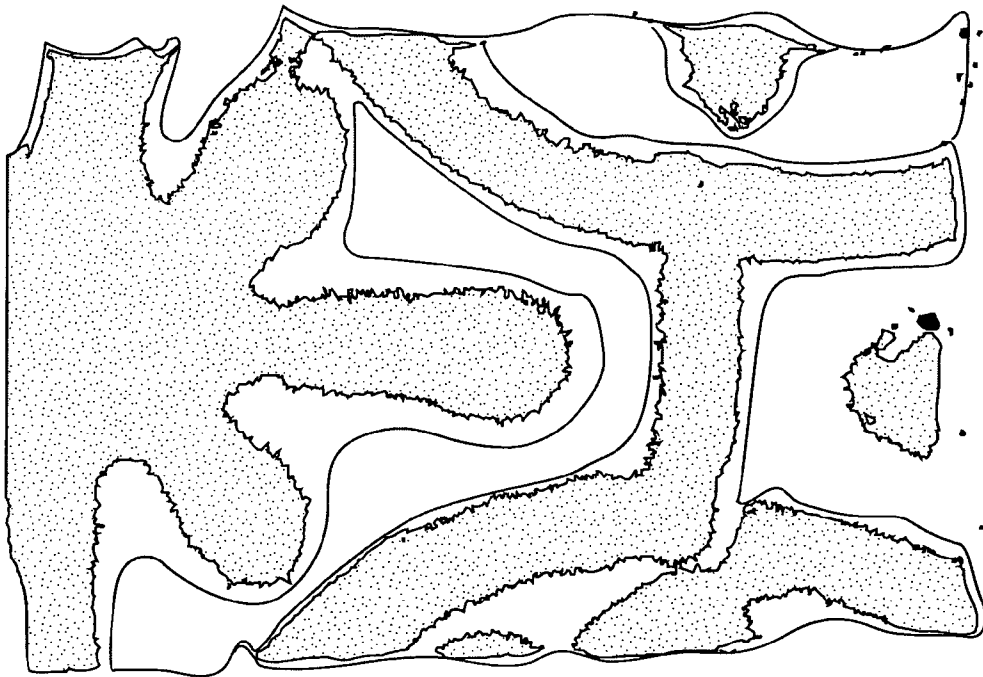


Figure 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/001311

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B28B19/00 B28B23/00
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 B28B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 228 507 B1 (HAHN RICHARD D W [US]) 8 May 2001 (2001-05-08) column 3, line 57 - column 4, line 23; figures 3,9,10	1-3,20, 21,27
X	US 2004/152379 A1 (MCLARTY GEORGE C [US] ET AL) 5 August 2004 (2004-08-05) paragraphs [0024], [0029]	1
A	US 2009/004378 A1 (JONES JOHN G [US]) 1 January 2009 (2009-01-01) claims 1,2; figure 1	1
A	US 2004/142618 A1 (PORTER JOHN FREDERICK [CA]) 22 July 2004 (2004-07-22) paragraph [0073]; figure 4	1

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier document but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
 "&" document member of the same patent family

Date of the actual completion of the international search

28 June 2010

Date of mailing of the international search report

06/07/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Boone, John

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2010/001311

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6228507	B1	08-05-2001	NONE
US 2004152379	A1	05-08-2004	AT 462847 T 15-04-2010 AU 2003298848 A1 30-08-2004 CA 2513934 A1 19-08-2004 EP 1597063 A1 23-11-2005 NZ 541851 A 29-06-2007 WO 2004069532 A1 19-08-2004
US 2009004378	A1	01-01-2009	CA 2685810 A1 08-01-2009 WO 2009006048 A2 08-01-2009
US 2004142618	A1	22-07-2004	AU 2004207774 A1 12-08-2004 CA 2513508 A1 12-08-2004 CN 1754015 A 29-03-2006 EP 1595012 A2 16-11-2005 JP 2006517268 T 20-07-2006 JP 2009149510 A 09-07-2009 JP 2009174310 A 06-08-2009 MX PA05007692 A 25-05-2006 NZ 541275 A 24-12-2008 US 2006105653 A1 18-05-2006 US 2006065342 A1 30-03-2006 WO 2004067271 A2 12-08-2004