



## Household slow sand filters in continuous and intermittent flows and their efficiency in microorganism's removal from river water

Nasser Fava, N. D. M., Terin, U. C., Freitas, B. L. S., Sabogal-Paz, L. P., Fernandez-Ibañez, P., & Anthony Byrne, J. (2020). Household slow sand filters in continuous and intermittent flows and their efficiency in microorganism's removal from river water. *Environmental Technology (United Kingdom)*, 1-10. Advance online publication. <https://doi.org/10.1080/09593330.2020.1841834>

[Link to publication record in Ulster University Research Portal](#)

**Published in:**  
Environmental Technology (United Kingdom)

**Publication Status:**  
Published online: 11/11/2020

**DOI:**  
[10.1080/09593330.2020.1841834](https://doi.org/10.1080/09593330.2020.1841834)

**Document Version**  
Author Accepted version

**Document Licence:**  
CC BY-NC

### General rights

The copyright and moral rights to the output are retained by the output author(s), unless otherwise stated by the document licence.

Unless otherwise stated, users are permitted to download a copy of the output for personal study or non-commercial research and are permitted to freely distribute the URL of the output. They are not permitted to alter, reproduce, distribute or make any commercial use of the output without obtaining the permission of the author(s).

If the document is licenced under Creative Commons, the rights of users of the documents can be found at <https://creativecommons.org/share-your-work/licenses/>.

### Take down policy

The Research Portal is Ulster University's institutional repository that provides access to Ulster's research outputs. Every effort has been made to ensure that content in the Research Portal does not infringe any person's rights, or applicable UK laws. If you discover content in the Research Portal that you believe breaches copyright or violates any law, please contact [pure-support@ulster.ac.uk](mailto:pure-support@ulster.ac.uk)

1 **Drinking Water Treatment by Multistage Filtration on a Household Scale:**  
2 **Efficiency and Challenges**

3

4 R. C. Medeiros<sup>a</sup>, N. de M. N. Fava<sup>b</sup>, B. L. S. Freitas<sup>b</sup>, L. P. Sabogal-Paz<sup>b\*</sup>, M. T.  
5 Hoffmann<sup>b</sup>, J. Davis<sup>c</sup>, P. Fernandez-Ibañez<sup>c</sup>, J. A. Byrne<sup>c</sup>

6

7 <sup>a</sup> Department of Engineering and Environmental Technology. Federal University of  
8 Santa Maria. Zip Code: 98400-000. Frederico Westphalen - Rio Grande do Sul, Brazil.

9

10 <sup>b</sup> Department of Hydraulics and Sanitation, São Carlos School of Engineering,  
11 University of São Paulo, Trabalhador São-Carlense Avenue, 400, São Carlos, São  
12 Paulo, 13566-590, Brazil.

13

14 <sup>c</sup> Nanotechnology and Integrated Bioengineering Centre, School of Engineering, Ulster  
15 University, Jordanstown, BT37 0QB, Northern Ireland, United Kingdom

16

17 \* *Email: lysaboga@sc.usp.br*

18

19 Universalising actions aimed at water supply in rural communities and indigenous  
20 populations must focus on simple and low-cost technologies adapted to the local  
21 context. In this setting, this research studied the dynamic gravel filter (DGF) as a  
22 pre-treatment to household slow-sand filters (HSSFs), which is the first  
23 description of a household multistage filtration scale to treat drinking water. DGFs  
24 (with and without a non-woven blanket on top of the gravel layer) followed by  
25 HSSFs were tested. DGFs operated with a filtration rate of  $3.21 \text{ m}^3 \cdot \text{m}^{-2} \cdot \text{d}^{-1}$  and

26 HSSFs with  $1.52 \text{ m}^3 \cdot \text{m}^{-2} \cdot \text{d}^{-1}$ . Influent water contained kaolinite, humic acid and  
27 suspension of coliforms and protozoa. Physical-chemical parameters were  
28 evaluated, as well as *Escherichia coli*, *Giardia* spp. cysts and *Cryptosporidium*  
29 spp. oocyst reductions. Removal was low (up to 6.6%) concerning true colour,  
30 total organic carbon and absorbance ( $\lambda=254\text{nm}$ ). Nevertheless, HMSFs showed  
31 turbidity decrease above 60%, *E. coli* reduction up to 1.78 log, *Giardia* cysts and  
32 *Cryptosporidium* oocysts reductions up to 3.15 log and 2.24 log, respectively. The  
33 non-woven blanket was shown as an important physical barrier to remove solids,  
34 *E. coli* and protozoa.

35  
36 Keywords: drinking water; low-cost technology; slow sand filtration; protozoa;  
37 *Escherichia coli*.

38  
39 Abbreviations:

40 DGF: dynamic gravel filter

41 HMSF: household multistage filter

42 HSSF: household slow-sand filter

43 SSF: slow sand filtration

44 MSF: multistage filtration

45 VSS: volatile suspended solids

## 1. Introduction

According to Sustainable Development Goal 6, the aim is to achieve universal and equitable access to safe drinking water, sanitation and hygiene, particularly for the poorest and most vulnerable communities by 2030 (WHO and UNICEF, 2017). Inadequate sanitation produces millions of waterborne diseases (Perez et al., 2012) and the higher risks are for children living in low- and middle-income countries (Speich et al., 2016). Clearly, there are large gaps between urban and rural coverage of drinking water and sanitation services in these areas (WHO and UNICEF, 2017). In this context, Efstratiou et al. (2017) emphasised that *Giardia* cysts and *Cryptosporidium* oocysts were the main causes of waterborne outbreaks worldwide.

Decentralised water treatment is crucial in improving the drinking water consumed by the poorest population (Baig et al., 2011). The WHO recommended household water treatment as a way to increase access to safe water for people, who live in rural areas in developing countries (WHO, 2011).

Household slow sand filters (HSSFs) are highlighted as a technology for drinking water treatment in rural communities. HSSFs can promote effective removal of pathogens and particulate matter. Its simple design, easy and cheap construction, operation and maintenance may contribute to improving life quality in rural communities (Manz, 2007).

The main HSSF mechanisms to remove microbiological and physicochemical parameters are filtration, adsorption and microbiological activity (Jenkins et al., 2011). Helminths and particulate matter removal are due to trapping in the pores between sand grains and attachment to the surfaces of the sand grains (Jenkins et al., 2011; Manz, 2007). There are studies that have reported bacteria, viruses and protozoa reductions, as

71 well as cyanobacteria, cyanotoxins and turbidity removals (Elliott et al., 2011; Terin and  
72 Sabogal-Paz, 2019; Wang et al., 2014). Clasen et al. (2015) reported that HSSF reduced  
73 50% of diarrhoea cases in children.

74 Recently, HSSFs have been optimised by using new materials, sand bed depth  
75 reduction, different sand sizes and filter ripening ways, adding non-woven blankets to  
76 the top layer and operation in continuous and intermittent flows (Calixto et al., 2020;  
77 Elliott et al., 2008; Faria Maciel and Sabogal-Paz, 2018; Napotnik et al., 2017; Souza  
78 Freitas and Sabogal-Paz, 2019; Young-Rojanschi and Madramootoo, 2014).

79 HSSFs have limitations that are analogous to conventional slow filters when  
80 removing solids and organic compounds. The excess of suspended material in the  
81 influent water obstructs the intergranular voids causing a reduction in the filter run and  
82 an increase in cleaning activities (Souza Freitas and Sabogal-Paz, 2019). Therefore,  
83 coarse media filtration could be used as a pre-treatment, creating the multistage  
84 filtration (Galvis et al. 2002). There should be more than one treatment stage, within the  
85 multi-barrier concept, which would act in the gradual removal of fine particles and  
86 microorganisms in order to produce safe water (Visscher, 2006). Consequently, pre-  
87 filtration with coarse gravel (when included) would make the HSSF more efficient  
88 when turbid water is treated.

89 In this context, the aims of this study were to evaluate the HMSF performance to  
90 remove physicochemical and microbiological parameters from influent water with high  
91 levels of colour and turbidity.

92

## 93 **2. Materials and Methods**


94

### 95 **2.1. HMSF Construction**


96

HMSF had a dynamic gravel filter (DGF) as a pre-treatment of HSSFs (Figure


97 1).

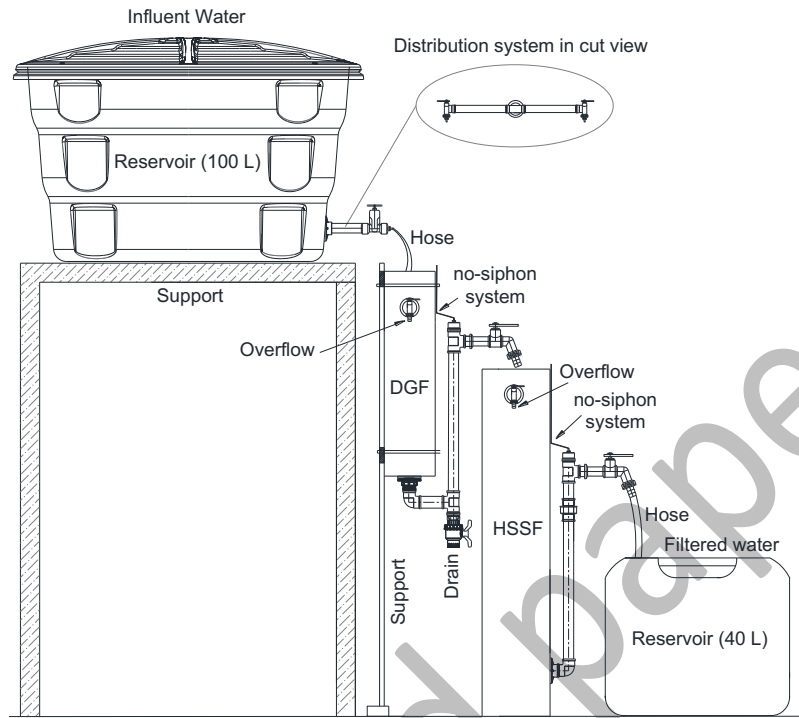

a) HMSF scheme

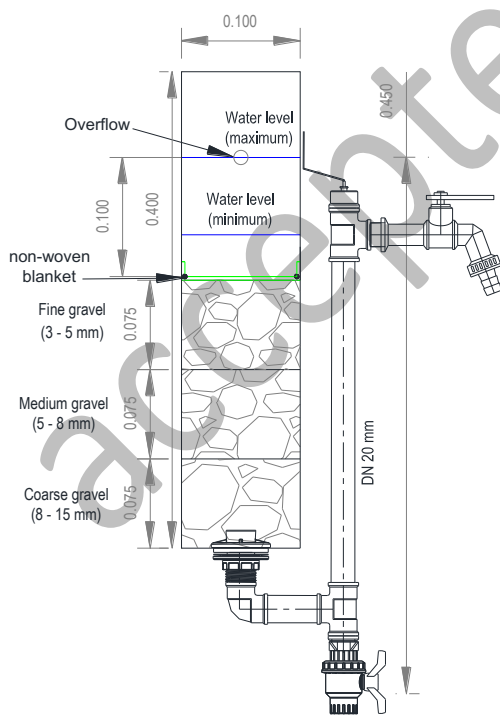

b) DGF scheme (units in meters)

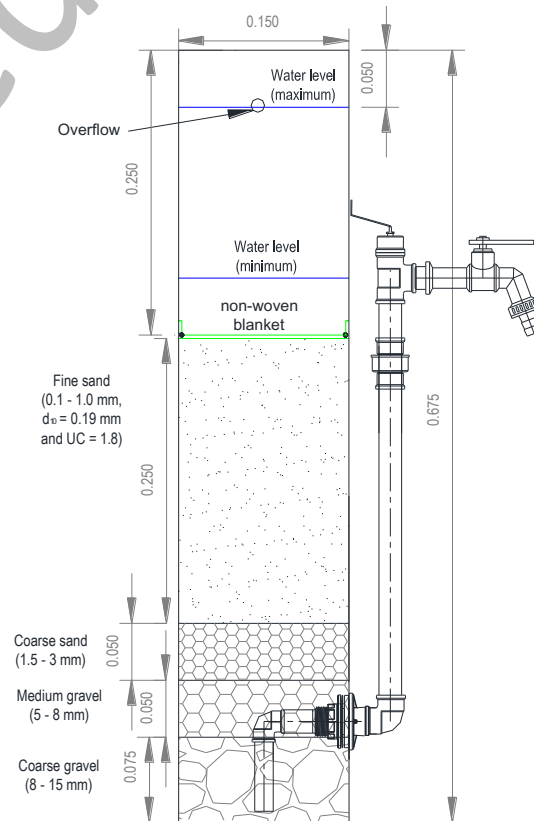

c) HSSF scheme (units in meters)

98 Figure 1. HMSF with a dynamic gravel filter (DGF) as a pre-treatment of an HSSF

99 Two HMSFs were evaluated wherein DGF (with and without a non-woven  
100 blanket on top of the gravel layer) was followed by HSSFs. DGFs were constructed in  
101 PVC pipes with a 99.8 mm inside diameter (cross-sectional area = 0.0078 m<sup>2</sup>). DGF  
102 was filled with three gravel layers of 7.5 cm thickness each (coarse gravel with 8.0 to 15  
103 mm, medium gravel with 5.0 to 8.0 mm and fine gravel with 3.0 to 5.0 mm). HSSFs  
104 were equally built out of PVC with 145 mm inside diameter (cross-sectional area =  
105 0.0164 m<sup>2</sup>) and they were filled with two gravel layers which worked as support media  
106 (sizes: 5 to 8 mm and 8 to 15 mm) followed by a coarse sand layer (1.5 to 3.0 mm) and  
107 fine sand (0.1 to 1.0 mm) with an effective size ( $D_{10}$ ) of 0.19 mm and uniformity  
108 coefficient ( $D_{60}/D_{10}$ ) of 1.8, as recommended by CAWST (2012).

109 The filters were called DGF1 (with a non-woven blanket in the top layer), DGF2  
110 (without non-woven blanket), HSSF1 and HSSF2 (household sand filters with a non-  
111 woven blanket in the top layer with identical characteristics between them). A non-  
112 woven blanket (100% polyester, specific mass of 0.2 g cm<sup>-3</sup> and thickness of 2 mm) was  
113 positioned and fixed by a PVC ring slightly smaller than the inside filter diameter.

114

## 115 **2.2. HMSF Operation**

116

117 HMSFs were operated in continuous flow with a daily production of 25 L, more  
118 than the 20 L per day established as a minimum volume for basic health protection  
119 (WHO, 2003), thus DGFs and HSSFs operated with filtration rates of  $3.21 \pm 0.09$   
120 m<sup>3</sup>.m<sup>2</sup>.d<sup>-1</sup> and  $1.52 \pm 0.04$  m<sup>3</sup>.m<sup>2</sup>.d<sup>-1</sup>, respectively. HMSFs were monitored over 140  
121 days and during this period, two stops in the filter operation took place, one lasting 19  
122 days and the other 14 days. The stops were purposeful in order to assess what would  
123 happen in a home when the filters stop feeding, for example, during family holidays.

124 HMSFs worked closely to what would happen in a rural residence, that is, the  
125 reservoir of 100 L was filled and 25 L.d<sup>-1</sup> were forwarded to each HMSF; therefore,  
126 there was a declining filtration rate and valves were calibrated daily for each HMSF.  
127 Filter head loss was evaluated every other day and the HMSF stopped for maintenance  
128 when the flow rate was less than 25 L.d<sup>-1</sup>.

129

### 130 **2.3. HMSF maintenance**

131

132 Blankets were removed from each filter and cleaned with deionised water and  
133 the cleaning liquid was stored for physicochemical and microbiological analysis. The  
134 same procedure was followed with the fluid drained from each DGF. Blankets were  
135 removed from each HSSF and the biological layer (*schmutzdecke*) was removed by  
136 splashing deionised water. The sand top was agitated manually three times and after  
137 was left steady for 1.0 min for sedimentation, then the supernatant was removed and  
138 stored for analysis as well.

139

### 140 **2.4. Tracer tests**

141

142 Tracer tests were performed three times prior to HMSF operation. A solution of  
143 100 mg.L<sup>-1</sup> of NaCl was used as the tracer. A 100-L reservoir was filled with saline  
144 solution and a submersible water pump HM-5063 (Jeneca®, China) was placed for  
145 homogenisation to take place. A conductivity probe (Vernier® Software &  
146 Technologies, USA) with a Go!link® interface was positioned at an outlet pipe and the  
147 data was collected by Logger Lite® software (Vernier Software & Technologies, USA).  
148 The tracer test was carried out until the salt solution was close to 100 mg.L<sup>-1</sup> in the filter



149 output. Microsoft Excel® was used to develop the normalisation curve of tracer  
 150 concentration over time and Origin 8.6® (Originlab, EUA) was used for data analysis  
 151 resulting in the residence time distribution curve. Mean residence times in each filter  
 152 were determined and the flow pattern was adjusted according to three hydrodynamic  
 153 mathematical models (low dispersion, high dispersion and N-continuous stirred tank  
 154 reactors) as recommended by Levenspiel (1999).

155

## 156 2.5. Influent Water

157

158 Influent water was a mixture of well water, 60 mg.L<sup>-1</sup> of kaolinite (Sigma  
 159 Aldrich®), 20 mg.L<sup>-1</sup> of humic acid (Sigma Aldrich®) and *Escherichia coli* (ATCC  
 160 11229) which were agitated for 30 min by a mechanical mixer. Influent water was  
 161 prepared to reach similar characteristics of challenge test water used for validating  
 162 drinking water technologies, as described in WHO (2014). Well water and influent  
 163 water characteristics are shown in Table 1.

164

165 Table 1 - Well water and influent water characteristics for the study

Parameter	Mean ± Standard deviation	
	Well water	Influent water
pH	6.24 ± 0.33	7.65 ± 0.15
Temperature (°C)	22.7 ± 1.7	22.7 ± 0.8
Total Alkalinity (mg CaCO <sub>3</sub> L <sup>-1</sup> )	26.4 ± 3.8	34.03 ± 8.31
Conductivity (µS cm <sup>-1</sup> )	59.7 ± 6.7	68.1 ± 6.7
True Colour (HU)	3.2 ± 3.6	246 ± 22
Apparent Colour (HU)	1.8 ± 2.8	338 ± 36
Turbidity (NTU)	0.177 ± 0.091	42 ± 16.7
Absorbance (λ = 254 nm)	0.015 ± 0.031	0.554 ± 0.101
Total organic carbon -TOC (mg L <sup>-1</sup> )	3.13 ± 3.95	7.63 ± 0.71
Particle size (nm)	Not analysed	1116 ± 317
<i>Escherichia coli</i> (CFU 100 mL <sup>-1</sup> )	0	1.03 x 10 <sup>5</sup>

---

Total coliforms (CFU 100 mL <sup>-1</sup> )	0.2 ± 0.4	0
---	-----------	---

---

166

167           After 53, 64 and 88 days of continuous operation, approximately 10<sup>3</sup> cysts of  
168 *Giardia lamblia* and 10<sup>2</sup> oocysts of *Cryptosporidium parvum* from purified suspensions  
169 (Waterborne® Inc, USA) were added to the DGFs and HSSF inlets. In these three  
170 assays, cysts and oocysts were added over four consecutive days prior to protozoa  
171 analysis. Between the 101<sup>st</sup> and 140<sup>th</sup> days of continuous operation, cysts and oocysts  
172 were added daily and four protozoa analyses were performed.

173

174           **2.6. Sampling and analysis**

175

176           Temperature, pH, turbidity, apparent colour, true colour, absorbance ( $\lambda=254$   
177 nm), total alkalinity, conductivity, particle size, total organic carbon (TOC), *E. coli* and  
178 total coliforms were analysed according to APHA et al. (2012).

179

180           **2.6.1. Protozoa analysis**

181

182           Protozoa protocols included membrane filtration and triple centrifugation.  
183 Filtration with cellulose mixed ester membranes (47 mm diameter and 3  $\mu$ m nominal  
184 porosity, Millipore®) was performed according to Franco et al. (2016) without  
185 immunomagnetic separation (IMS). Samples from DGFs and HSSFs were filtered until  
186 reaching the number of five ester membranes used. Cysts and oocysts were eluted by  
187 scraping the membrane three times using Tween 80 (0.1%, 45 °C). Samples were kept  
188 in 50 mL Falcon tubes for centrifugation at 1,500 x g for 15 min. Supernatant was  
189 discarded until the pellet was 5 mL, and then it was mixed for homogenisation. After

190 another centrifugation (1,500 x g; 15 min), the supernatant of each sample was  
191 discarded until 1 mL pellet was left for analysis.

192 Samples from the non-woven blanket cleaning water, the DGF drain and the  
193 HSSF biological layer were concentrated by triple centrifugation at 1,500 x g for 15  
194 min, following the Medeiros and Daniel (2018) protocol. Samples were kept in 50 mL  
195 Falcon tubes for centrifugation at 1,500 x g for 15 min. Afterwards, the supernatant was  
196 removed until 5 mL. 10 mL of elution solution (Tween 80, 0.1% v/v) was added and  
197 mixed by 30s. Centrifugation was performed again and the supernatant was removed,  
198 10 mL of deionised water were added and, after mixing, a third and last centrifugation  
199 was done. The remaining 5 mL were stored overnight in a refrigerator. The final pellet  
200 was vortexed and the Dynabeads™ GC-Combo (TermoFisher Scientific®)  
201 manufacturer's protocol was followed to perform immunomagnetic separation (IMS).  
202 Two acid dissociations were carried out to increase cyst and oocyst recoveries,  
203 according to Method 1623.1 (USEPA, 2012).

204 Protozoa detection for both methods (membrane filtration and triple  
205 centrifugation) was performed by immunofluorescence assay (IFA) using the  
206 Merifluor® kit (Meridian Bioscience Diagnostics, USA), following the manufacturer's  
207 protocol and Method 1623.1 (USEPA, 2012). Sample observations were made using an  
208 epifluorescence microscope (Olympus® BX51). Cysts and oocysts were identified by  
209 their size, morphology, shape and fluorescence and their concentration per litre was  
210 calculated according to Method 1623.1 (USEPA, 2012) in filtered water. Protozoa  
211 concentration per gram of total solids (referring to 50 mL of sample) was calculated for  
212 samples obtained from non-woven blanket cleaning, DGF drain and the HSSF  
213 biological layer.

214 Analytical quality assays were performed for each protozoan concentration  
215 method to verify how the matrix would influence protozoan recovery. The assays were  
216 performed four times plus the blank test, under equal conditions, inoculating  
217 approximately 3,000 *Giardia* cysts and 300 *Cryptosporidium* oocysts extracted from  
218 purified suspensions purchased from Waterborne® Inc, USA. Moreover, 15 µL of  
219 purified *Cryptosporidium* oocyst suspension and 5 µL of *Giardia* cysts were evaluated  
220 in triplicate to estimate the mean number of inoculated organisms in the matrix.

221 For membrane filtration protocol, four beakers containing 1.0 L of filtered water  
222 were spiked with cysts and oocysts and mixed with magnetic stirring for 2 min. After  
223 this period, the method explained above was followed.

224 For the triple centrifugation method with IMS, a sample of the drainage liquid  
225 from DGF was utilised since it showed turbidity and colour similar to the HSSF  
226 biological layer and non-woven blanket cleaning samples. In this case, a 25 mL sample  
227 was disposed into 50 mL Falcon tubes and cysts and oocysts were inoculated. Falcon  
228 tubes were mixed for 30s and they were filled again with the sample upon reaching 50  
229 mL. A final mixture lasting 30s was performed on the sample before starting the  
230 method described above. Recovery (R%) for each protocol was calculated by Equation  
231 1.

$$232 \quad R(\%) = \frac{\text{cysts and oocysts recovered}}{\text{cysts and oocysts spiked} + \text{number of indigenous (oo)cysts of the sample}} \times 100 \quad (1)$$

233

## 234 **2.7. Microorganisms present in the non-woven blanket**

235

236 Bright field microscopy was performed with 20 µL of samples from DGF1 and  
237 HSSF blankets, in Agar 2%, after the last maintenance. Microorganism visualisation  
238 was carried out under a microscope (Olympus® BX60) at 100x to 2000x magnification.

239 Samples of each used blanket (DGF1 and HSSFs) and new blanket (blank test) were  
240 analysed by a Scanning Electron Microscope (SEM), (Zeiss® LEO 440) to capture  
241 photomicrographs at 300 to 10,000 x magnification.

242

## 243 **2.8. Statistical analysis**

244

245 Statistica® 7.0 (StatSoft, Inc, 2004) was used for statistical analysis. The  
246 Shapiro-Wilk test was applied in order to verify data normality. Comparisons between  
247 DGFs, HSSFs and HMSFs were made by the Student's t-test and Tukey test for  
248 multiple comparisons. When data, even after transformation, did not present normality,  
249 we resorted to the Mann-Whitney U test. There was a study of Pearson's correlation  
250 (parametric data) and Spearman's (non-parametric data) correlation between physical  
251 and operating variables and *E. coli* and protozoa reductions. P-values less than 0.05  
252 were considered significant.

253

## 254 **3. Results and Discussion**


255

### 256 **3.1. Tracer Tests**

257

258 Tracer test results for the four filters are shown in Figure 2. The N-CSTR model  
259 offered the best fit to all of the filter data, considering Pearson's correlation coefficient  
260 ( $r^2$ ): DGF1 (0.93); DGF2 (0.91); HSSF1 (0.99) and HSSF2 (0.99). Therefore, the numbers  
261 of reactors in series were  $9 \pm 2$  for DGF1,  $8 \pm 2$  for DGF2,  $8 \pm 2$  for HSSF1 and  $7 \pm 0.1$   
262 for HSSF2, closer to the plug flow reactor, according to Levenspiel (1999). A similar  
263 performance was described by Faria Maciel and Sabogal-Paz (2018), Terin and Sabogal-

264 Paz (2019) and Sabogal-Paz et al. (2020), characterising a plug flow reactor for the HSSF  
265 as well.

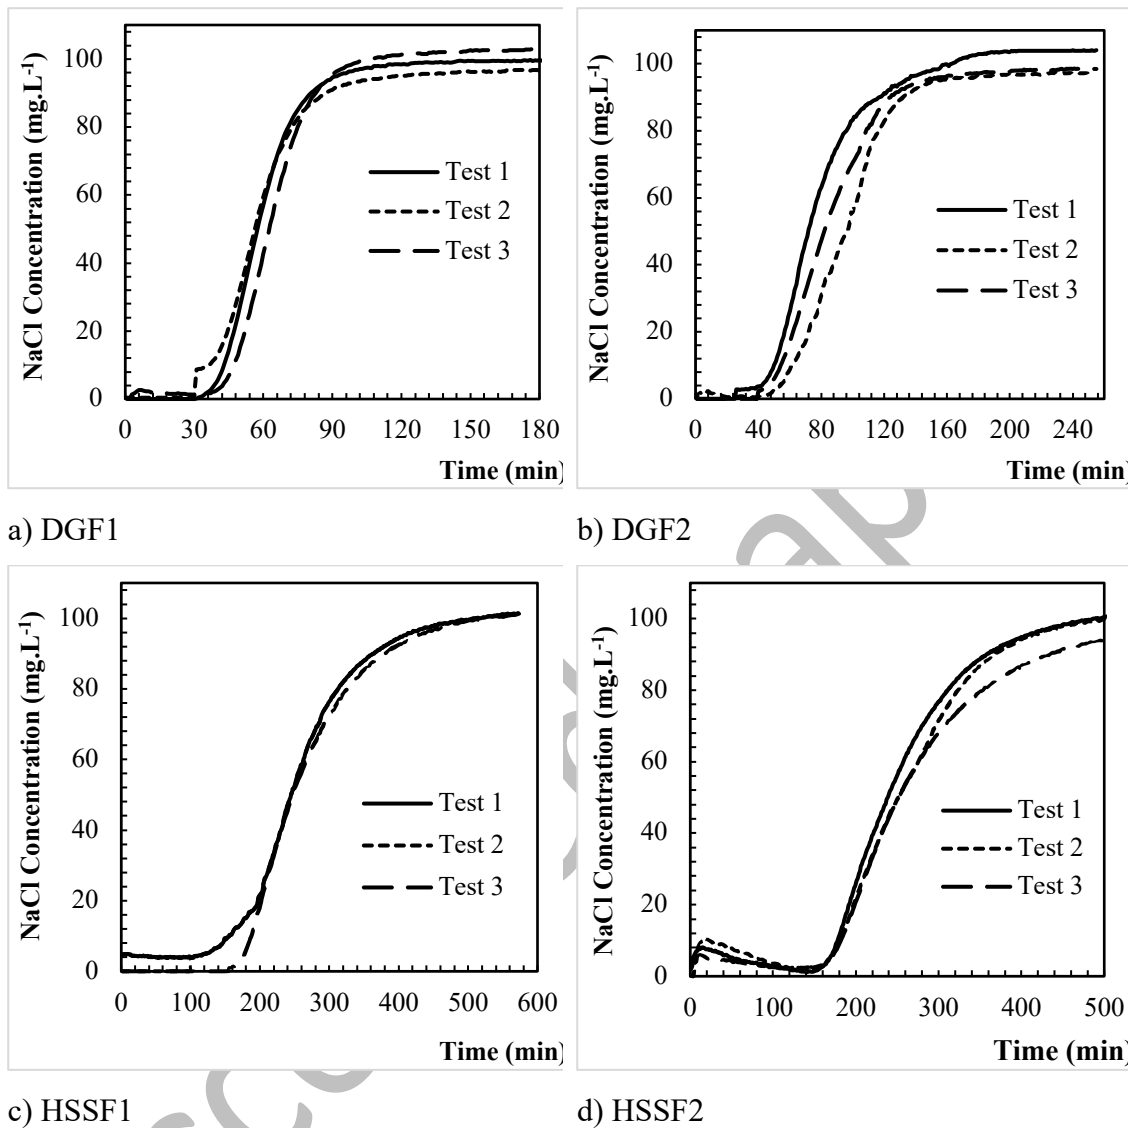

266

267 Figure 2 - Tracer tests results in triplicate

268

269 Mean residence times used for estimating the sampling times were  $61 \pm 4$  min

270 for DGF1,  $86 \pm 7$  min for DGF2,  $258 \pm 8$  min for HSSF1 and  $261 \pm 3$  min for HSSF2.

271 HSSF flow characterisation is an important operational parameter (e.g. it can define the

272 water sampling time) and few studies have considered this aspect (Sabogal-Paz et al.

273 2020).

274

**3.2. HMSF Operation**

275 Filtered water features and HMSF efficiencies (DGF+HSSF) are shown in Table 2.

276 Table 2. Filtered water characteristics for each filter and HMSF efficiencies

Parameter	Mean $\pm$ Standard deviation (SD)			
	DGF1	HSSF1	DGF2	HSSF2
pH	7.59 $\pm$ 0.11	7.61 $\pm$ 0.09	7.58 $\pm$ 0.12	7.62 $\pm$ 0.08
Temperature ( $^{\circ}$ C)	22.4 $\pm$ 0.6	22.4 $\pm$ 0.7	22.4 $\pm$ 0.6	22.3 $\pm$ 0.6
Conductivity ( $\mu$ S.cm $^{-1}$ )	68.2 $\pm$ 6.8	68 $\pm$ 6.4	68.1 $\pm$ 6.5	68 $\pm$ 7
True Colour (Hu)				
Mean $\pm$ SD	244 $\pm$ 24	236 $\pm$ 35	244 $\pm$ 25	232 $\pm$ 45
Removal (%)	1.3 $\pm$ 2	3.4 $\pm$ 8	0.9 $\pm$ 1.9	5.9 $\pm$ 14
DGF + HSSF removal (%)	4.6 $\pm$ 8.3		6.6 $\pm$ 14.4	
Apparent Colour (Hu)				
Mean $\pm$ SD	306 $\pm$ 32	286 $\pm$ 35	311 $\pm$ 34	285 $\pm$ 42
Removal (%)	10.3 $\pm$ 4.1	6.5 $\pm$ 6.4	8.6 $\pm$ 3.8	8.7 $\pm$ 8.5
DGF + HSSF removal (%)	16.2 $\pm$ 5.7		16.6 $\pm$ 8.4	
Turbidity (NTU)				
Mean $\pm$ SD	18.1 $\pm$ 3.5	13.8 $\pm$ 3	19.2 $\pm$ 4	14.1 $\pm$ 3.3
Removal (%)	53.6 $\pm$ 11.7	23.2 $\pm$ 9.8	50.7 $\pm$ 12.2	26 $\pm$ 11.3
DGF + HSSF removal (%)	64.6 $\pm$ 8.9		64 $\pm$ 9.1	
Absorbance ( $\lambda$ 254 nm)				
Mean $\pm$ SD	0.550 $\pm$	0.537 $\pm$	0.551 $\pm$	0.541 $\pm$
Reduction (%)	0 $\pm$ 2.1	1.3 $\pm$ 2.9	0.1 $\pm$ 1.9	0.5 $\pm$ 2.6
DGF + HSSF removal (%)	1.2 $\pm$ 2.9		0.5 $\pm$ 2.2	
TOC (mg.L $^{-1}$ )				
Mean $\pm$ SD	7.76 $\pm$ 0.76	7.40 $\pm$ 1.03	7.76 $\pm$ 0.82	7.36 $\pm$ 1.37
Removal (%)	-0.3 $\pm$ 4.6	5.8 $\pm$ 7.5	0.7 $\pm$ 3.2	5.4 $\pm$ 12.5
DGF + HSSF removal (%)	5.6 $\pm$ 7.5		6.0 $\pm$ 13.6	
Particle size (nm)				
Mean $\pm$ SD	583.1 $\pm$ 81	453.4 $\pm$ 32.5	595.8 $\pm$	453.4 $\pm$ 40.9
Removal (%)	43.9 $\pm$ 16.3	21.1 $\pm$ 10.7	42.6 $\pm$ 16.8	23 $\pm$ 10.2
DGF + HSSF removal (%)	56 $\pm$ 13.2		55.9 $\pm$ 14	
<i>E. coli</i> (CFU 100 ml $^{-1}$ )				
Geometric Mean	1.8 x 10 $^4$	1.7 x 10 $^3$	2.6 x 10 $^4$	3.0 x 10 $^3$
Maximum value	8.8 x 10 $^4$	3.5 x 10 $^4$	1.1 x 10 $^5$	6.9 x 10 $^3$
Minimum value	5.0 x 10 $^2$	5.6 x 10 $^1$	1.0 x 10 $^3$	1.0 x 10 $^2$
Reduction (log)	0.76 $\pm$ 0.36	1.02 $\pm$ 0.49	0.55 $\pm$ 0.32	0.98 $\pm$ 0.71
DGF + HSSF reduction	1.78 $\pm$ 0.65		1.53 $\pm$ 0.77	

Note: HMSF = DGF + HSSF

277 DGF and HSSF were not efficient in true colour removal, as also reported by  
278 Sánchez et al. (2006). This might be related to the difficulty in slow sand filtration (SSF)  
279 in removing humic substances (Ellis and Wood, 1985). As apparent colour is influenced  
280 by turbidity and particle size, its removal was superior to the true colour (Table 2). There  
281 were no statistical differences among the filters in the removal of true and apparent colour.


282 Turbidity removal mainly happened in DGF (about 50%) and this confirms the  
283 role of this filter in protecting the HSSF against high turbidity, smoothed turbidity peaks  
284 and avoiding filter clogging (Galvis et al., 2002; Sánchez et al., 2006; Visscher, 2006).  
285 DGF1 and DGF2 provided higher turbidity removal than the findings obtained by Franco  
286 et al. (2012). Nevertheless, these authors found higher apparent colour removal.

287 HMSF turbidity removals were higher than those found by Galvis et al. (2002)  
288 and Sánchez et al. (2012). However, when HSSF1 and HSSF2 were evaluated, their  
289 efficiencies (around 64%) were lower than that reported by Elliott et al. (2008), Faria  
290 Maciel and Sabogal-Paz (2018), Frank et al. (2014), Lynn et al. (2013), Murphy et al.  
291 (2010) and Young-Rojanschi and Madramootoo (2014), with turbidity removals in the  
292 range from 74 to 96%. This divergence is associated to influent water characteristics  
293 between studies. There were no statistical differences between DGF, HSSF and HMSF in  
294 the study.

295 Influent water turbidity and filtered water during the operating time are shown in  
296 Figure 3. Turbidity peaks for influent water happened when the parameter measurement  
297 occurred on the same day as the water preparation. HMSFs were able to maintain final  
298 turbidity around 20 NTU. However, filtered water did not meet the World Health  
299 Organisation (WHO) guidelines for drinking water, that is, 5.0 NTU, as also reported by  
300 Baig et al. (2011). It should be noted that turbidity below 1.0 NTU is associated with 1-  
301 2 log and 2.5-3 log reduction of viruses and protozoa, respectively (WHO, 2017). Some



302 studies used influent water with low turbidity (3.90-12.6 NTU), such as Ahmmed and  
 303 Davra (2011), Elliot et al. (2008) and Stauber et al. (2006), achieving better HSSFs  
 304 performances. Influent water prepared with kaolinite and low nutrient concentration may  
 305 have influenced the filter efficiency in our study, as reported by Faria Maciel and Sabogal-  
 306 Paz (2018) and Sabogal-Paz et al (2020).

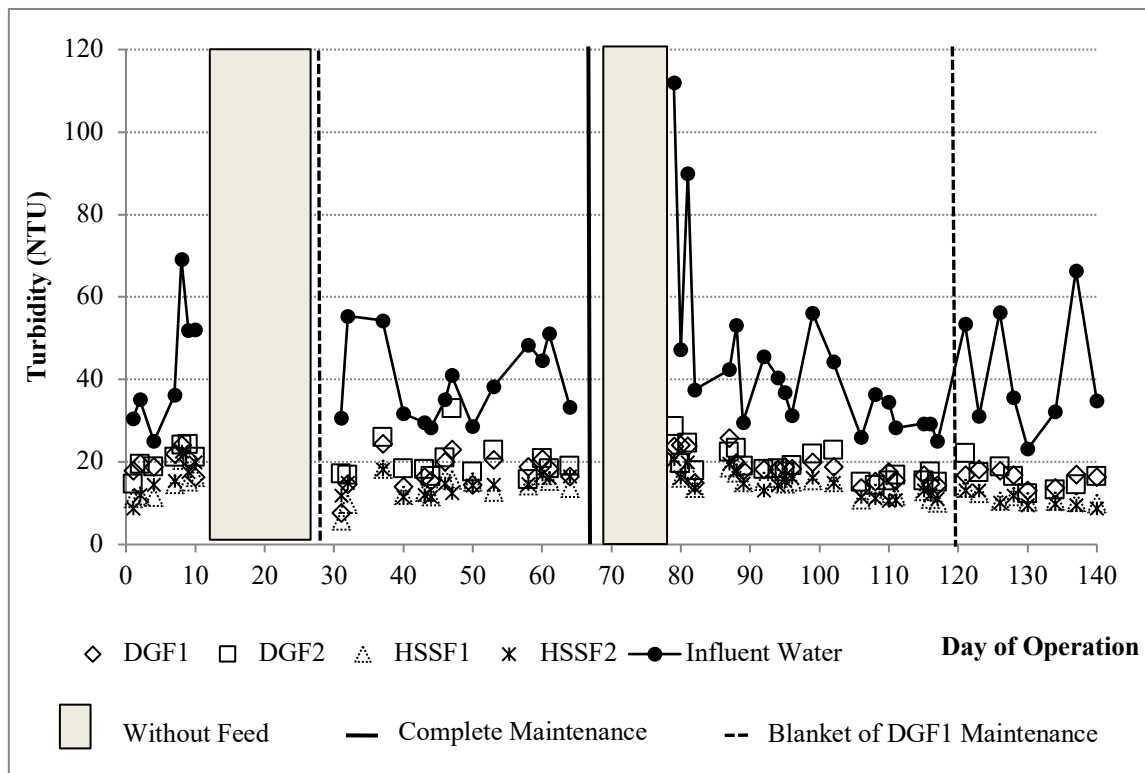

307

308 Figure 3 - Performance of DGFs and HSSFs in turbidity removal.

309

310 There was significant correlation between the influent water turbidity with both  
 311 DGF efficiencies ( $r = 0.724$  and  $0.783$ , for DGF1 and DGF2, respectively). Similar  
 312 findings were found by Franco et al. (2012) and Galvis et al. (2002), who reported that  
 313 turbidity removal increased in the occurrence of peaks in raw water for DGF.

314

315 For all of the filters under study, turbidity removal did not correlate to the HMSFs'  
 316 running time, when analysing the total period (140 days). However, there was significant  
 correlation between the running time and turbidity removal during the period after

317 maintenance of the non-woven blankets on the 64<sup>th</sup> operation day, for DGF2 ( $r = 0.61$ )  
318 and HSSF1 ( $r = 0.57$ ).


319 Particle size evaluation was important to understand how each filter in HMSF  
320 works. After the 53<sup>rd</sup> day, after adding cysts and oocysts, the particle size of the influent  
321 water increased ( $1205.8 \pm 296.3$  nm) and showed a statistical difference in relation to  
322 prior protozoan inoculum ( $768 \pm 131.2$  nm) ( $p = 0.0043$ ). Higher particle size removal  
323 can be seen in the DGFs (Table 2), analogous to the turbidity results obtained. There were  
324 no statistic differences between the DGFs, HSSFs and HMSFs.

325 Filter ripening for the operation days was significantly correlated to a reduction in  
326 particle size for DGF2 ( $r = 0.41$ ), HSSF1 ( $r = 0.50$ ), HMSF1 ( $r = 0.55$ ) and HMSF2 ( $r =$   
327  $0.53$ ). This find may indicate that DGF removed the larger particles when compared with  
328 HSSFs and this might be due to the lower media depth present in the latter (Elliott et al.,  
329 2008).

330 There was no statistical difference between DGFs, HSSFs and the HMSFs (Mann-  
331 Whitney U test) when TOC was evaluated. HSSF efficiency in organic compound  
332 removal was lower (around 5%) than the results found by Lynn et al. (2013) and Souza  
333 Freitas and Sabogal-Paz (2019). Nevertheless, the discrepancy in organic carbon removal  
334 may be related to compound composition (high or low biodegradability) and influent  
335 water characteristics (Campos et al., 2002; Modal et al., 2007). Low nutrient  
336 concentrations in the influent water can impair the biological activity in HSSFs (Lynn et  
337 al., 2013) and this situation may explain the lowest absorbance ( $\lambda=254$  nm) and colour  
338 removals in our study, since only humic acid, kaolinite and *E. coli* were added to the  
339 influent water.

340 *E. coli* reduction during filter operation is shown for HMSF1 (Figure 4a) and for  
341 HMSF2 (Figure 4b). Among HSSFs there were no significant statistical differences;

342 however, DGF1 showed a better performance than DGF2, according to the statistical test  
 343 ( $p = 0.018$ ). HSSFs had greater efficiency than DGFs, among HSSF1 and DGF1 ( $p =$   
 344  $0.014$ ), and HSSF2 and DGF2 ( $p = 0.023$ ).  
 345

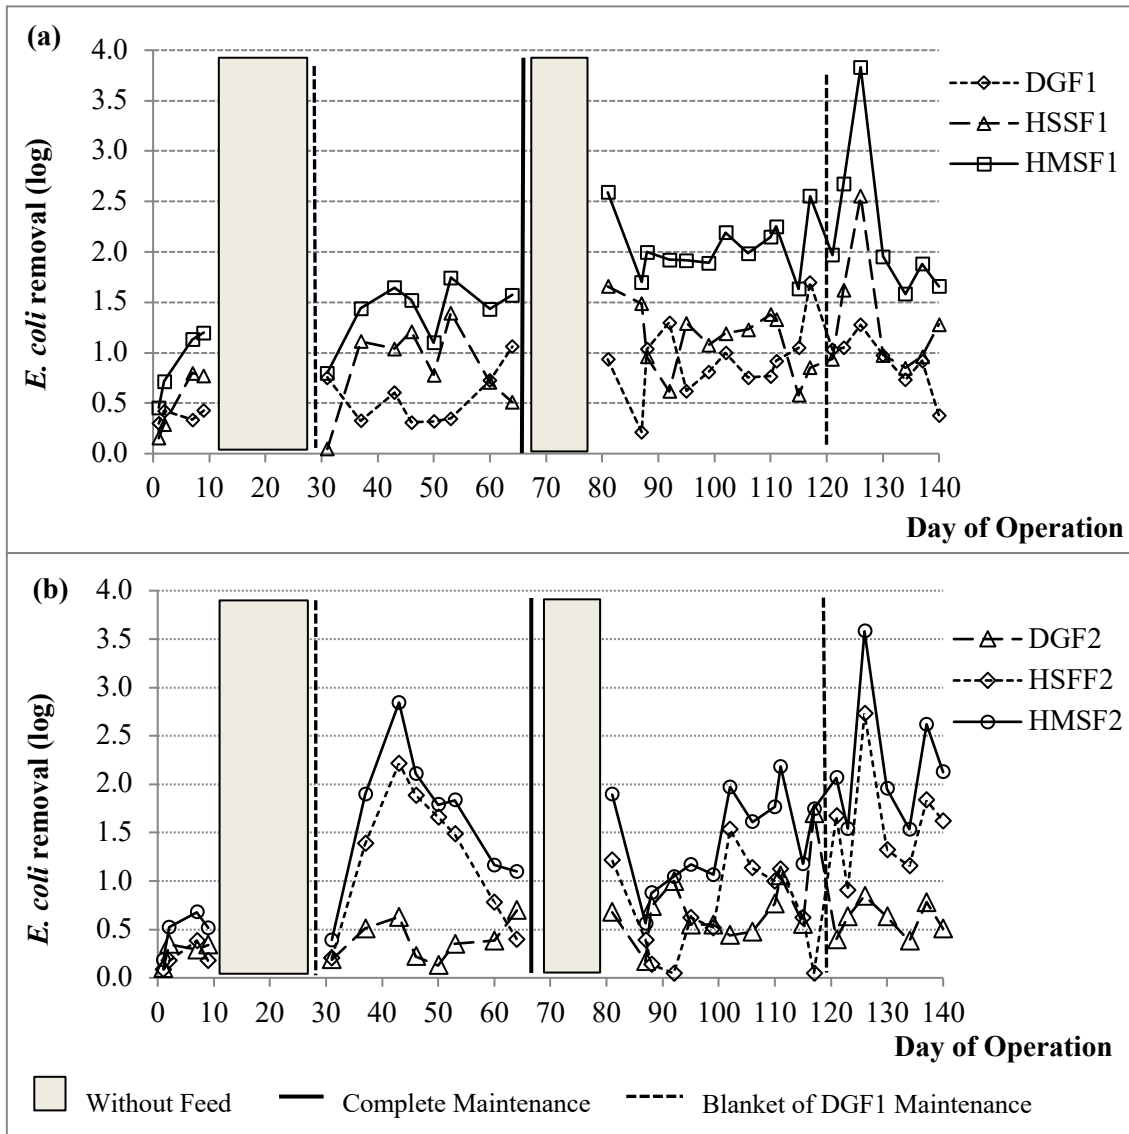

346  
 347 Figure 4 - *E. coli* reduction for DGFs and HSSFs

348  
 349 Young-Rojanschi and Madramootoo (2014) achieved removals up to 3.7 log and  
 350 Souza Freitas and Sabogal-Paz (2019) obtained reductions close to 3.0 log in HSSFs,  
 351 values higher than those obtained in our study (around 1.0 log, according to Table 2). On

352 the other hand, HMSFs showed mean reductions close to that obtained by Galvis et al.  
353 (2002), between 1.9 to 4.0 log for full-scale MSF systems composed by DGF followed  
354 by SSF.

355 *E. coli* reductions provided by DGF1, DGF2 and HSSF1 had a correlation with  
356 the operation days, due to filter ripening, and this finding matches the results obtained by  
357 Faria Maciel and Sabogal-Paz (2018) and Stauber et al. (2006). In addition, DGF ripening  
358 occurred through the progressive accumulation of particles and microorganisms as it  
359 happens in SSFs (Galvis et al., 2002).

360 Natural die-off can contribute to *E. coli* reductions due to stress, lack of nutrients,  
361 lack of oxygen, entrapment in sand pores and predation in the biological layer, as well as  
362 adsorption in the filter media (CAWST, 2012; Elliott et al., 2015).

363 Blanket cleaning in DGF1 negatively affected the HSSF1 performance (after the  
364 31<sup>st</sup> day) and in *E. coli* reduction DGF1 (after the 121<sup>st</sup>), with  $r = -0.77$  and  $r = -0.82$ ,  
365 respectively, according to the statistical study.

366 Complete HMSF maintenance, with blanket cleaning, DGFs drained and HSSF  
367 surface layer cleaning was done aiming to assess system resilience. Prior to that, there  
368 was no significant statistical difference between HMSFs for *E. coli* reduction, which did  
369 not happen after complete maintenance, with HMSF1 providing a better performance than  
370 that compared to HMSF2, according to the statistical test ( $p = 0.0015$ ). HMSF1 showed  
371 nearly constant *E. coli* reduction of 2.0 log, after 10 days of complete maintenance, while  
372 HMSF2 presented greater instability (Figure 4). HMSFs obtained higher *E. coli* reduction  
373 at 126 days of operation, with 3.83 log and 3.53 log for HMSF1 and HMSF2, respectively.  
374 Faria Maciel and Sabogal-Paz (2018) reported a need for 140 days to reach maximum  
375 HSSF efficiency due to a low concentration of nutrients in the influent water that affected  
376 filter ripening. After complete HMSF maintenance both HMSFs required around 14 days

377 to achieve progressive *E. coli* reduction and this fact was caused by their biofilm change,  
378 affecting HSSF efficiency.

379 A filter ripening period after cleaning must be carefully evaluated since the  
380 development of the biological layer is essential to improve microorganisms and turbidity  
381 removals in HSSFs (Ahammed and Davra, 2011; Bellamy et al., 1985; Napotnik et al.,  
382 2017).

383 Significant statistical results (Pearson test) were found by correlating physical  
384 variables with *E. coli* reduction in the following cases: i) HSSF2, with turbidity removal  
385 ( $r = 0.41$ ) and a reduction in particle size ( $r = 0.46$ ); and ii) after complete maintenance,  
386 in HSSF2 ( $r = 0.57$ ) and HMSF2 ( $r = 0.55$ ) with a decrease in particle size. However,  
387 turbidity and particle size in DGF output did not influence the *E. coli* reductions in HSSFs,  
388 according to the statistical test.

389 HMSFs were not fed for 19 days at the beginning of the operation and 14 days  
390 near the end of the operation to evaluate the HMSF performance after normal stops such  
391 as family holidays. Evidently, the HSSFs were affected and they took days to reach their  
392 efficiency and this phenomenon was also reported by Souza Freitas and Sabogal-Paz  
393 (2019). Filter ripening depends on the influent water quality, including nutrients and  
394 biodegradable carbon such as D-glucose (Modal et al., 2007) and natural coagulant  
395 (Souza Freitas and Sabogal-Paz, 2019). However, biological layer formation can reach  
396 days or even months to get completely formed. Therefore, the rapid ripening of the filter  
397 should be better studied to avoid abandoning technology in rural areas when it presents  
398 poor performance in some periods.

399

### 400 **3.3. Protozoan tests**

401

402 Analytical quality assays results are shown in Table 3. *Giardia* spp. cyst recovery  
 403 was statistically higher than *Cryptosporidium* spp. oocysts for both methods. The relative  
 404 standard deviation and mean met the Method 1623.1 (USEPA, 2012) and blank tests did  
 405 not present protozoa for both protocols.

406


407 Table 3 - Analytical quality assays results for *Giardia* spp. cysts and *Cryptosporidium*  
 408 spp. oocysts

Methods	Membrane Filtration + IFA		Triple Centrifugation + IMS +	
Protozoa	<i>Cysts</i>	<i>Oocysts</i>	<i>Cysts</i>	<i>Oocysts</i>
Cysts and oocysts inoculated	3329 ± 149	314 ± 8	3387 ± 155	307 ± 12
Recovery (%)				
Tests	<i>Cysts</i>	<i>Oocysts</i>	<i>Cysts</i>	<i>Oocysts</i>
Test 1	106	45	79	58
Test 2	90	29	79	36
Test 3	81	51	73	45
Test 4	95	45	87	47
Mean ± RSD	93 ± 11.4	42.2 ± 22.5	79.3 ± 7.2	46.7 ± 19.2

Note: RSD: relative standard deviation; IFA immunofluorescence assay; and IMS: immunomagnetic separation.

409

410 *Giardia* spp. cysts were detected in DGF and HSSF filtered water samples (93%  
 411 and 21%, respectively). *Cryptosporidium* spp. oocysts were also found in filtered water  
 412 (71% of DGFs and 43% of HSSFs). Standard deviation and the average protozoa removal  
 413 are shown in Figure 5.

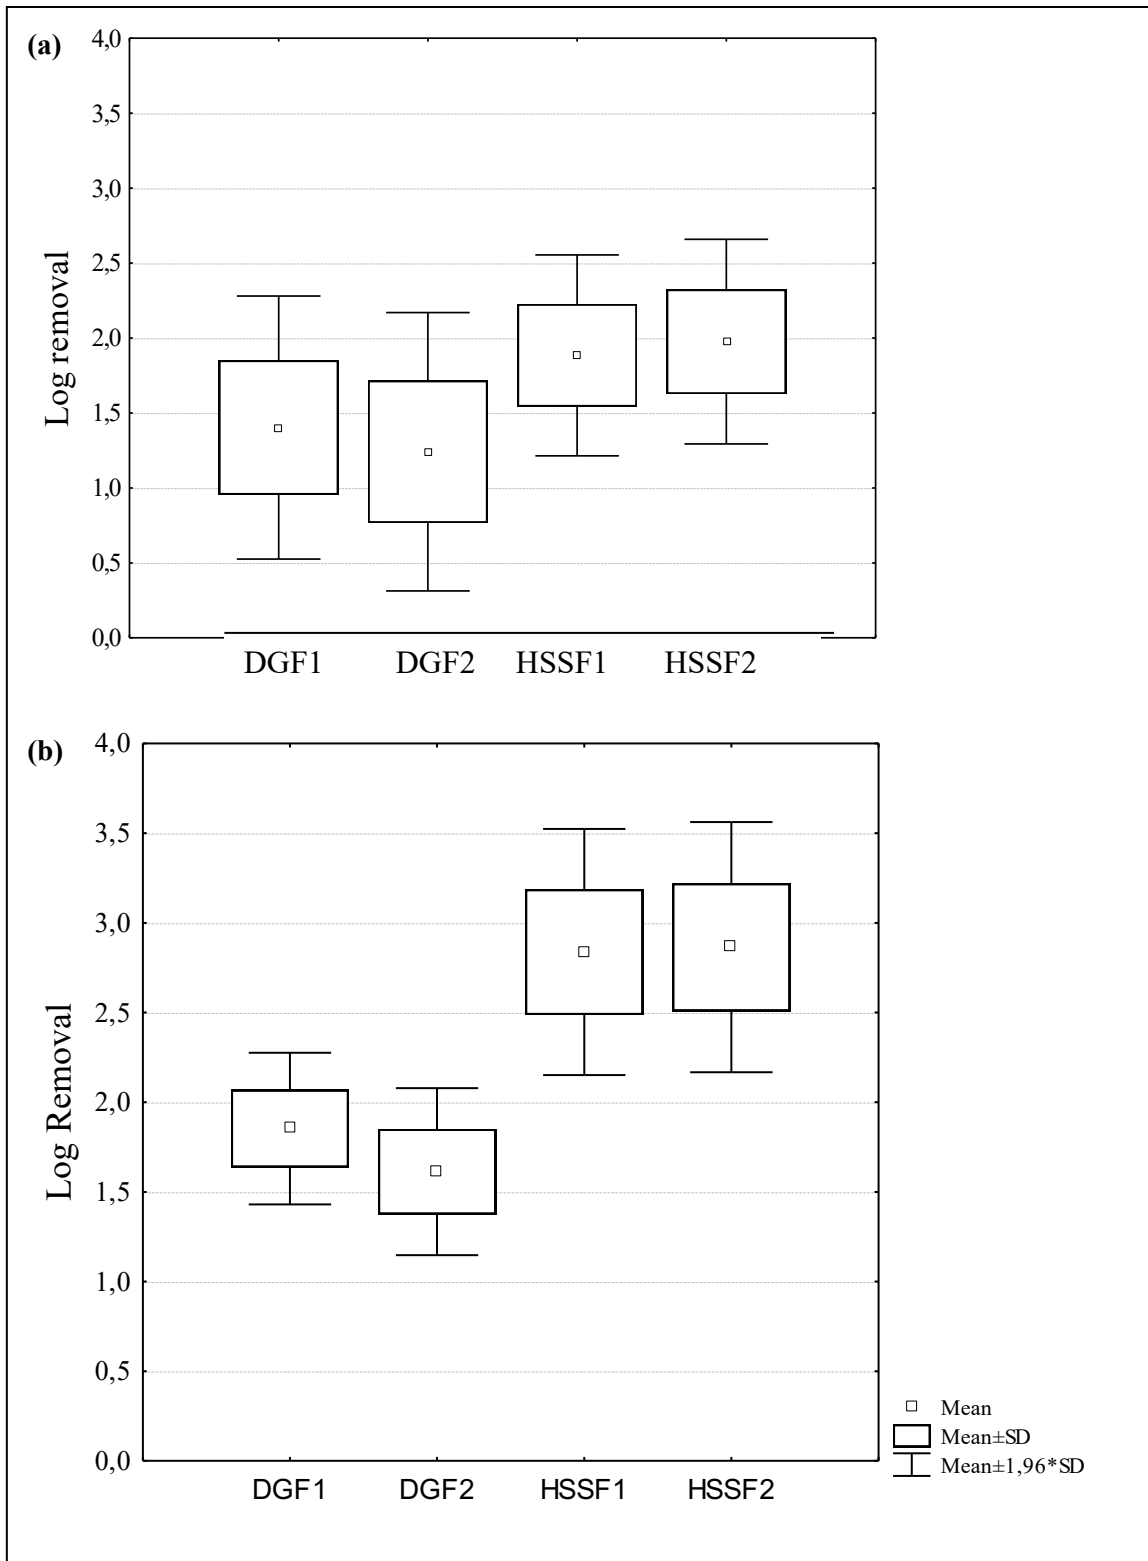

414

415 Figure 5 – DGF and HSSF efficiencies in *Cryptosporidium* spp. oocyst removal (a) and

416 *Giardia* spp. cyst removal (b).

417

418 Filters removed *Giardia* spp. cysts more than *Cryptosporidium* spp. oocysts,  
419 except for DGF2, that did not show a statistical difference. HSSFs were more efficient in  
420 removing both protozoa than DGFs, due to their low filtration rate and sand grain size.

421 DGFs showed no difference in protozoa removal, according to statistical tests,  
422 with  $1.40 \log \pm 0.45$  (DGF1) and  $1.24 \log \pm 0.47$  (DGF2) for oocysts ( $p = 0.490$ ) and  $1.85$   
423  $\log \pm 0.22$  (DGF1) and  $1.61 \log \pm 0.24$  (DGF2) for cysts ( $p = 0.096$ ). There were also no  
424 statistical differences between HSSFs for protozoa removal as well, reaching  $1.88 \log \pm$   
425  $0.34$  (HSSF1) and  $1.98 \log \pm 0.35$  (HSSF2) for oocysts ( $p = 0.789$ ). *Giardia* spp. cyst  
426 removal efficiency was also equal between the HSSFs with  $2.84 \log \pm 0.35$  (HSSF1) and  
427  $2.86 \log \pm 0.36$  (HSSF2) ( $p = 0.966$ ). Our results are similar to those obtained by Bellamy  
428 et al. (1985) and Palmateer et al. (1999) and these authors emphasized the role of the  
429 biological layer on the filter performance. Sand grain size and sand bed depth are also  
430 important in protozoa removal (Hijnen et al., 2007). Our findings were better than those  
431 obtained by Fogel et al. (1993). Higher uniformity coefficient of the sand bed helps  
432 protozoan removal, especially oocysts, due to the inequality of the grain size of the sand,  
433 which generates winding water paths inside the filter.

434 *Giardia* cyst removals had a correlation with the filter operation time for DGF2 ( $r$   
435  $= 0.82$ ) and HSSF2 ( $r = 0.77$ ). Consequently, filter ripening as well as adherence and  
436 transport mechanisms are important for cyst and oocyst removals (Fogel et al., 1993;  
437 Tufenkji et al., 2006; Verma et al., 2017).

438 HMSFs showed no statistical differences for cyst and oocyst removals. HMSF1  
439 obtained  $3.13 \log \pm 0.35$  and  $2.16 \log \pm 0.35$  and HMSF2 obtained  $3.15 \log \pm 0.36$  and  
440  $2.24 \log \pm 0.39$  for cysts ( $p = 0.898$ ) and oocysts ( $p = 0.928$ ), respectively. HMSF2  
441 operation time had a relation with *Giardia* ( $r = 0.78$ ) and *Cryptosporidium* ( $r = 0.84$ )  
442 removals, according to the statistical test.



443 Protozoan removal had no correlation with particle size decrease and with influent  
 444 water particle size, according to the statistical test. The analogous result happened when  
 445 *E. coli* reduction, turbidity removal and influent water turbidity were associated in the  
 446 statistical test.

447

### 448 3.4. Sludge characteristics generated in HMSFs

449

450 Sludge characteristics generated in HMSFs are shown in Tables 4 and 5. Complete  
 451 filter maintenance occurred on the 64<sup>th</sup> and 140<sup>th</sup> days and DGF1 blanket cleaning  
 452 occurred on the 121<sup>st</sup> day (Figure 4).

453

454 Table 4 – DGF sludge characteristics

Parameter	Non-woven blanket (DGF1)			Drainage water DGF1		Drainage water DGF2	
	I	II	III	I	III	I	III
Apparent colour (HU)	2820	4020	3340	820	1510	655	568
Turbidity (NTU)	10200	4130	3340	640	1140	421	468
TS (mg L <sup>-1</sup> )	10898	27280	27900	1084	1912	1214	842
TDS (mg L <sup>-1</sup> )	1248	22670	23273	172	372	570	134
TSS (mg L <sup>-1</sup> )	9650	4610	4627	912	1540	644	708
FSS (mg L <sup>-1</sup> )	8038	3900	3909	786	1273	540	558
VSS (mg L <sup>-1</sup> )	1613	710	718	126	267	104	150
VSS/TSS (%)	17	15	16	14	17	16	21
<i>E. coli</i> (CFU mL <sup>-1</sup> )	5700	2600	280	330	550	330	640
<i>Giardia</i> spp. (cysts g <sup>-1</sup> )	356	2551	2534	830	607	346	3302
<i>Cryptosporidium</i> spp. (oocysts g <sup>-1</sup> )	6	11	211	nd	nd	nd	24

Notes: TS: total solids; TSS: total suspended solids; FSS: fixed suspended solids; VSS: volatile suspended solids; nd: not detected. I and III: completed maintenance of the filters, after 64<sup>th</sup> and 140<sup>th</sup> days of operation; II: maintenance of the non-woven blanket from DGFs, after 121<sup>st</sup> day of operation.

455

456 Table 5– HSSF sludge characteristics


Parameter	Non-woven blanket				Top sand layer			
	HSSF1		HSSF2		HSSF1		HSSF2	
	I	III	I	III	I	III	I	III
Apparent colour (HU)	855	1060	965	1850	1090	3460	1340	4080
Turbidity (NTU)	720	894	485	1160	590	2060	1060	1960
TS (mg L <sup>-1</sup> )	858	1160	746	1424	914	5000	1244	5480
TDS (mg L <sup>-1</sup> )	268	274	266	244	277	2900	167	3380
TSS (mg L <sup>-1</sup> )	590	886	480	1180	637	2100	1077	2100
FSS (mg L <sup>-1</sup> )	425	705	347	880	510	1650	847	1630
VSS (mg L <sup>-1</sup> )	165	182	133	300	127	450	230	470
VSS/TSS (%)	28	21	28	25	20	21	21	22
<i>E. coli</i> (CFU mL <sup>-1</sup> )	170	7	3	10	910	1200	1400	320
<i>Giardia</i> spp. (cysts g <sup>-1</sup> )	163	483	509	2598	44	2920	241	2117
<i>Cryptosporidium</i> spp. (oocysts g <sup>-1</sup> )	70	nd	27	1025	22	120	nd	2263

Notes: TS: total solids; TSS: total suspended solids; FSS: fixed suspended solids; VSS: volatile suspended solids; nd: not detected. I and III: completed maintenance of the filters, after 64<sup>th</sup> and 140<sup>th</sup> days of operation; II: maintenance of the non-woven blanket from DGFs, after 121<sup>st</sup> day of operation.


457

458 Solid retention was observed mainly in the DGF1 blanket and inside the DGFs'  
459 beds. In HSSFs, blanket and top sand layer showed high concentrations of total suspended  
460 solids, apparent colour and turbidity. VSS concentration increase was found between  
461 periods I and III for all the filters, except for DGF1 (between periods II and III) and this  
462 can be a result of microorganism accumulation (i.e. bacteria, free-living protozoa, fungi)  
463 in the *schumutzdecke*, blankets and inside the DGFs' beds, according to Figure 6.


464

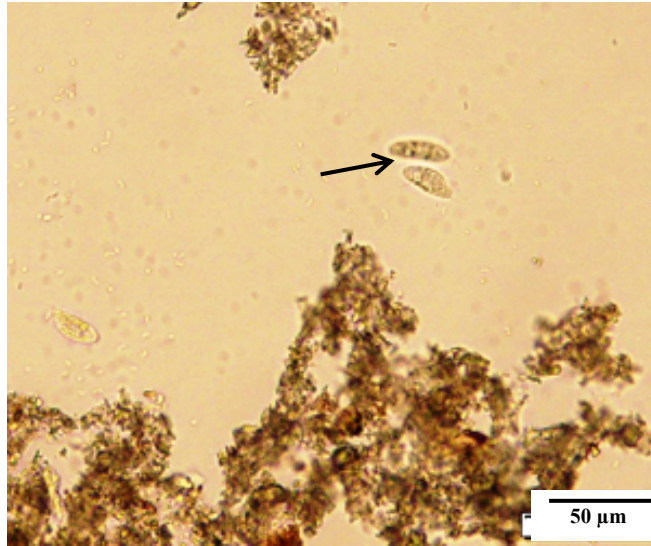

a) ciliate protozoa

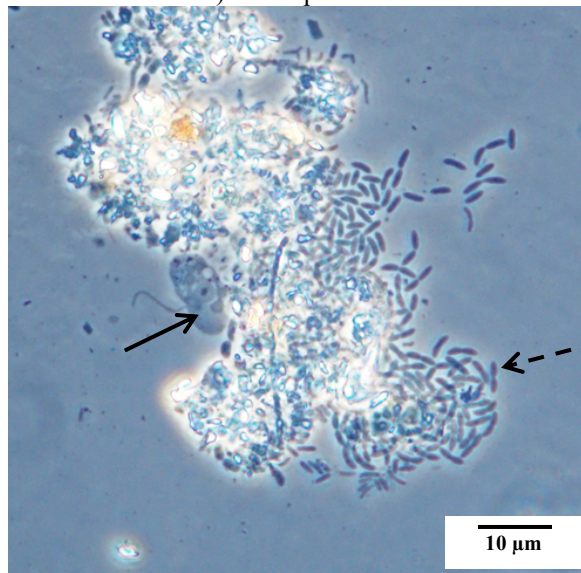

b) flagellate protozoa (continuous arrow) and bacteria (dashed arrow)

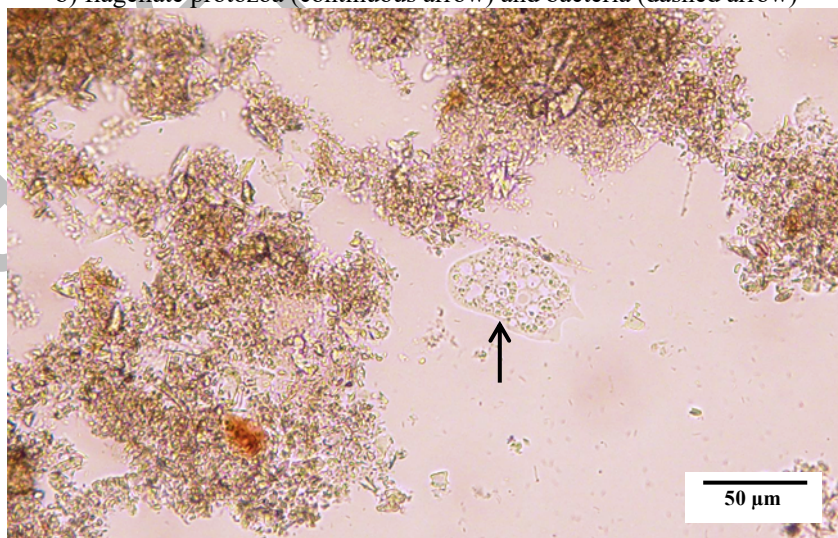

c) amoebae

465

466 Figure 6 - Microorganisms present in the blankets


467 In the blankets, microorganisms morphologically similar to ciliate protozoa  
468 (Figure 6a) were found, as well as flagellates (Figure 6b – continuous arrow), amoebae  
469 (Figure 6c) and a great amount of bacteria (i.e. cocci, bacilli, isolates and colonials, Figure  
470 6b – dashed arrow) and some fungal hyphae. The number of microorganisms visualised  
471 in the blankets followed the relation DGF1 > HSSF2 > HSSF1. The presence of  
472 zooplankton as ciliate protozoa, amoebae and rotifers is associated with the greater oocyst  
473 removal at the top sand bed (Hijnen et al., 2007). Some authors identified rotifers (Bichai  
474 et al., 2014) and ciliate protozoa (Siqueira-Castro et al., 2016) as predators of *Giardia*  
475 cysts and *Cryptosporidium* oocysts.

476 The blankets, mainly in DGF1, showed potential for protozoa removal. The  
477 HSSF2 blanket presented a higher concentration of cysts and oocysts per gram compared  
478 with the HSSF1 blanket. This fact can be explained by the DGF1 blanket role in protozoa  
479 retention. However, this might also be interpreted as a warning for careful and safe  
480 planned handling of the blankets when conducting filter maintenance to avoid any  
481 unnecessary biological risk exposure of the filters' operator. SEM images for the blankets  
482 are shown in Figure 7.

483 Images display solids accumulation in the blankets for DGF1 (Figure 7b), HSSF1  
484 (figure 7d) and HSSF2 (Figure 7e) compared to its original state (Figure 7a). Figures 7c  
485 and 7f show a large amount of kaolinite in the DGF1 blanket and a possible oocyst  
486 retained in the HSSF2 blanket as well (arrow in Figure 7f).

487 A positive aspect of the blankets is to facilitate the filter maintenance, especially  
488 on a household scale (Souza Freitas and Sabogal-Paz, 2019; Terin and Sabogal-Paz,  
489 2019). Blankets can also extend the filter run time since they protect the sand bed from  
490 particle deposition and the sand compaction (Faria Maciel and Sabogal-Paz, 2018; Modal

491 et al., 2007). However, the presence of blanket in DGF1 generated higher head loss,  
492 requiring two blanket cleanings, besides the complete maintenance.

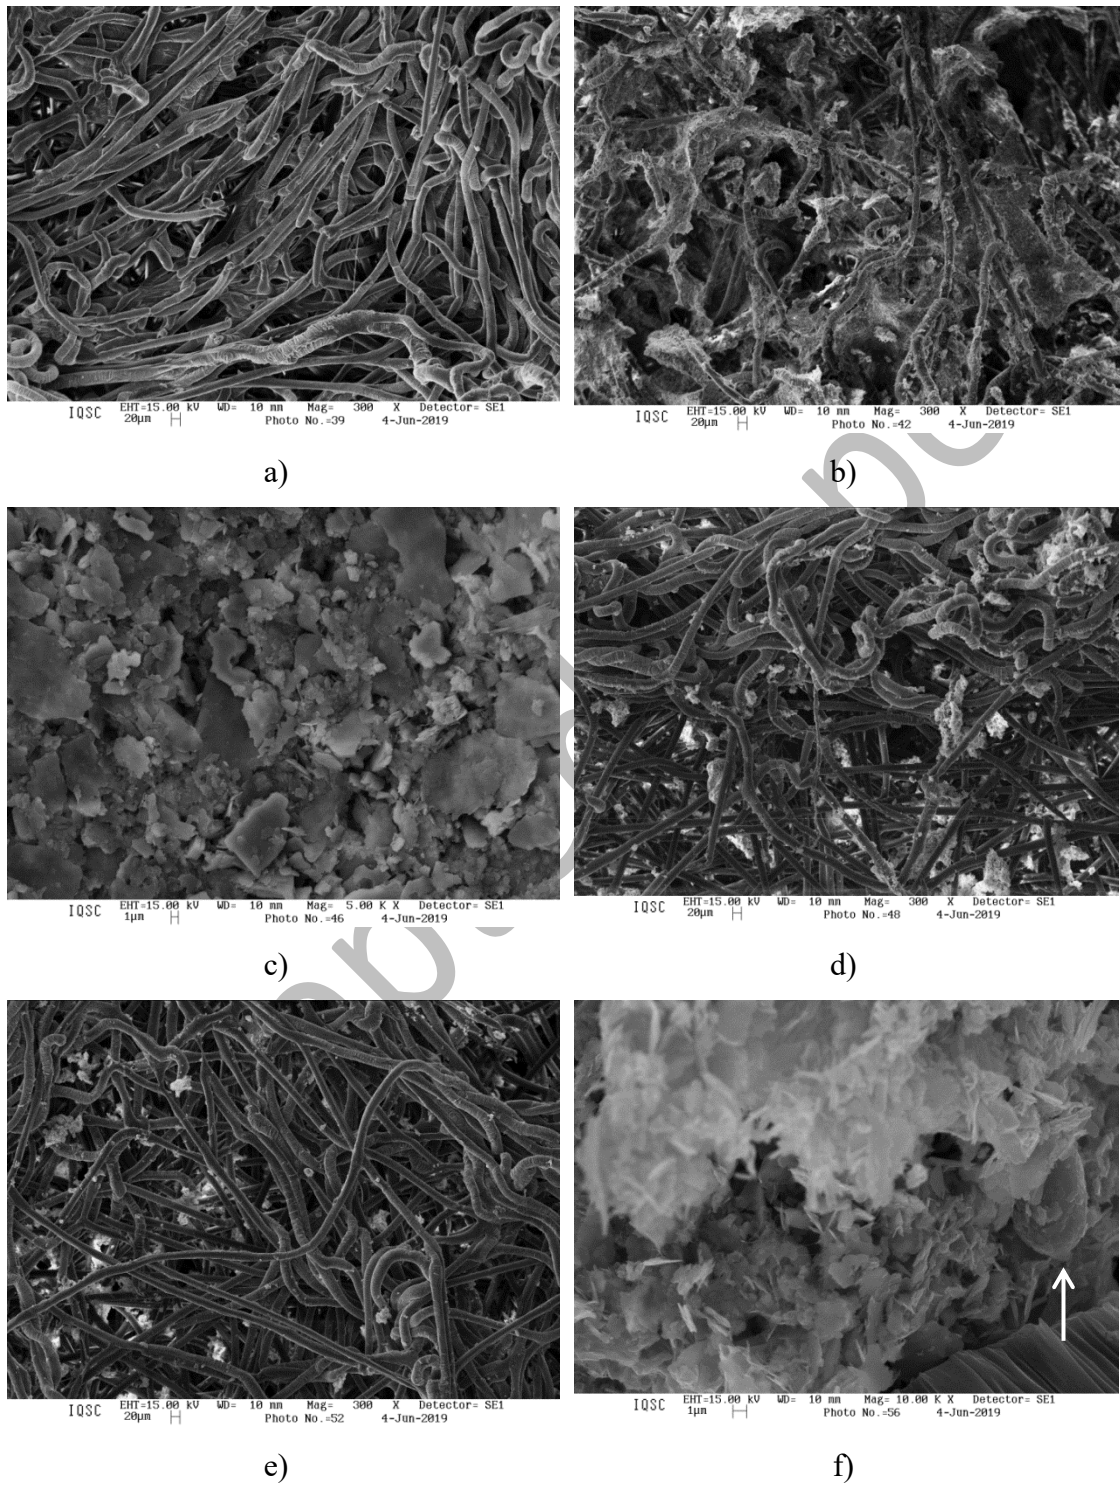

493 Figure 7 - SEM images for blankets (a, b, d and e: 300 x; c: 5,000 x; f: 10,000 x).

494

495 The DGF2 bed showed higher *E. coli* and protozoa retentions than the DGF1 bed,  
496 as a result of the blanket installed in DGF1 that retained part of these microorganisms,  
497 not allowing their penetration in the filter bed. The HSSF top sand layer was able to retain  
498 part of the protozoa and *E. coli* which passed through the DGFs.

499

#### 500 **4. Conclusions**

501

502 HMSF removed turbidity (> 60%), *E. coli* (>1.5 log) and protozoa (>2 log) from  
503 influent water; but it was not efficient for colour removal. On the other hand, HMSF  
504 was not enough to generate drinking water according to World Health Organisation  
505 guidance. Consequently, further studies are needed to optimise the technology.

506 There were few correlations according to statistical tests between operating  
507 parameters. Nonetheless, operation time must be evaluated as a filter ripening parameter  
508 since it influenced *E. coli* and protozoa removals.

509 Non-woven blankets acted as a physical and microbiological barrier, improving *E.*  
510 *coli* and cyst and oocyst retention and turbidity removal.

511 HMSFs with a non-woven blanket is a clear example of the multi-barrier concept,  
512 in which there is more than one treatment stage to improve water quality, with gradual  
513 removal of particles and microorganisms.

514

#### 515 **5. Acknowledgements**

516

517 This work was supported by the Global Challenges Research Fund (GCRF) UK

518 Research and Innovation (SAFEWATER; EPSRC Grant Reference EP/P032427/1).

519

520 **6. Statement**

521

522 Authors hereby declare previous originality check, no conflict of interest and  
523 open access to the repository of data used in this paper for scientific purposes.

524

525 **7. Supplementary Material**

526 Statistical analysis used in the study is provided.

527

528 **8. References**

529

530 Ahammed, M. M., Davra, K., 2011. Performance evaluation of biosand filter modified  
531 with iron oxide-coated sand for household treatment of drinking water.

532 Desalination 276, 287-293. <https://doi.org/10.1016/j.desal.2011.03.065>

533 APHA, AWWA, WEF, 2012. Standard Methods for Examination of Water and  
534 Wastewater, twenty-second ed. American Public Health Association, Washington,  
535 ISBN 978-087553-013-0, p. 1360.

536 Baig, S.A., Mahmood, Q., Nawab, B., Shafqat, M. N., Pervez, A., 2011. Improvement  
537 of drinking water quality by using plant biomass through household biosand filter  
538 – A decentralized approach. Ecol. Eng. 37, 1842-1848.

539 Bellamy, W.D., Hendricks, D.W., Logsdon, G.S., 1985. Slow sand filtration: influences  
540 of selected process variables. J Am Water Works Association December, 62-66.  
541 <https://doi.org/10.1002/j.1551-8833.1985.tb05659.x>

542 Bichai, F., Dullemont, Y., Hijnen, W., Barbeau, B., 2014. Predation and transport of  
543 persistent pathogens in GAC and slow sand filters: A threat to drinking water  
544 safety? Water Res. 64, 296-308. <http://dx.doi.org/10.1016/j.watres.2014.07.005>

545 Calixto, K. G., Sabogal-Paz, L. P., Pozzi, E., Campos, L. C. (2020). Ripening of  
546 household slow sand filter by adding fish Food. *J Water Sanit Hyg De.* 143.  
547 <https://doi.org/10.2166/washdev.2020.143>

548 Campos, L.C., Su, M.F.J., Graham, N.J.D., Smith, S.R., 2002. Biomass development in  
549 slow sand filters. *Water Res.* 26, 4543-4551.

550 CAWST, 2012. Biosand Filter Construction Manual. Centre for Affordable Water and  
551 Sanitation Technology. Calgary, Canada.

552 Clasen, T.F., Alexander, K.T., Sinclair, D., Boisson, S., Peletz, R., Chang, H.H.,  
553 Majorin, F., Cairncross, S., 2015. Interventions to improve water quality for  
554 preventing diarrhoea. *Cochrane Database Syst. Rev.* 10, CD004794.  
555 <https://doi.org/10.1002/14651858.CD004794.pub3>.

556 Efstratiou, A., Ongerth, J.E., Karanis, P., 2017. Waterborne transmission of protozoan  
557 parasites: review of worldwide outbreaks – an update 2011-2016. *Water Res.* 114,  
558 14-22. <https://doi.org/10.1016/j.watres.2017.01.036>

559 Elliott, M.A., Stauber, C.E., Koksal, F., DiGiano, F.A., Sobsey, M.D., 2008. Reductions  
560 of *E. coli*, echovirus type 12 and bacteriophages in an intermittently operated  
561 household-scale slow sand filter. *Water Res.* 42, 2662-2670.  
562 <https://doi.org/10.1016/j.watres.2008.01.016>.

563 Elliott, M.A., DiGiano, F.A., Sobsey, M.D., 2011. Virus attenuation by microbial  
564 mechanisms during the idle time of a household slow sand filter. *Water Res.* 45,  
565 4092-4102. <https://doi.org/10.1016/j.watres.2011.05.008>.

566 Elliott, M., Stauber, C.E., DiGiano, F.A., Aceituno, A.F., Sobsey, M.D., 2015.  
567 Investigation of *E. coli* and virus reductions using replicate, bench-scale biosand  
568 filter columns and two filter media. *Int. J Environ. Res. Public Health* 12, 10276-  
569 10299. <https://doi.org/10.3390/ijerph120910276>.



570 Ellis, K.V., Wood, W.E., 1985. Slow sand filtration. Crit Rev Environ Control 15, 315-  
571 354. <https://doi.org/10.1080/10643388509381736>

572 Faria Maciel, P.M, Sabogal-Paz, L.P., 2018. Household slow sand filters with and  
573 without water level control: continuous and intermittent flow efficiencies, Environ  
574 Technol. <https://doi.org/10.1080/09593330.2018.1515988>

575 Fogel, D., Isaac-Renton, J., Guasparini, R., Moorehead, W., Ongerth, J., 1993.  
576 Removing *Giardia* and *Cryptosporidium* by slow sand filtration. J Am Water  
577 Works Association November, 77-84. [https://doi.org/10.1002/j.1551-](https://doi.org/10.1002/j.1551-8833.1993.tb06105.x)  
578 8833.1993.tb06105.x

579 Franco, M., Silva, G.K., Paterniani, J.E.S., 2012. Water treatment by multistage  
580 filtration system with natural coagulant from *Moringa oleifera* seeds. Eng. Agríc.  
581 32, 989-997. <http://dx.doi.org/10.1590/S0100-69162012000500018>

582 Franco, R.M.B., Branco, N., Amaro, B.C.T., Cantusio Neto, R.; Fiuza, V.R.S., 2016.  
583 *Cryptosporidium* Species and *Giardia* Genotypes Detected in Surface Water  
584 Supply of Campinas, Southeast Brazil, by Molecular Methods. J Vet Med Res. 3,  
585 1–7.

586 Frank, T.E., Scheie, M.L., Cachro, V., Muñoz, A.S., 2014. The effect of increasing  
587 grain size in biosand water filters in combination with ultraviolet disinfection. J  
588 Water Sanit Hyg Dev. 4, 206-213. <https://doi.org/10.2166/washdev.2013.171>

589 Galvis, G.C., Latorre, J.M., Galvis, A.C., 2002. Multi-stage filtration technology. In:  
590 Small Community water supplies: technology, people and partnership. Eds. Smet,  
591 J.; van Wijk, C. Delft, The Netherlands, IRC International Water and Sanitation  
592 Centre. ISBN 90-6687-035-4, p. 585.

593 Hijnen, W.A.M., Dullemont, Y.J., Shijven, J.F., Hanzens-Brouwer, A.J., Rosielle, M.,  
594 Medema, G., 2007. Removal and fate of *Cryptosporidium parvum*, *Clostridium*

595 *perfringens* and small-sized centric diatoms (*Stephanodiscus hantzschii*) in slow  
596 sand filters. Water Res. 41, 2151-2162.  
597 <https://doi.org/10.1016/j.watres.2007.01.056>

598 Jenkins, M.W., Tiwari, S.K., Darby, J., 2011. Bacterial, viral and turbidity removal by  
599 intermittent slow sand filtration for household use in developing countries:  
600 Experimental investigation and modelling. Water Res. 54, 6227-6239.  
601 <https://doi.org/10.1016/j.watres.2011.09.022>

602 Levenspiel, O., 1999. Chemical Reaction Engineering, third ed. John Wiley & Sons,  
603 Inc. Industrial & Engineering Chemistry Research.  
604 <https://doi.org/10.1021/ie990488g>

605 Lynn, T.J., Wanjugi, P., Harwood, V.J., Ergas, S.J., 2013. Dynamic performance of  
606 biosand filters. J Am Water Works Association.  
607 <http://dx.doi.org/10.5942/jawwa.2013.105.0116>

608 Manz, D.H., 2007. Biosand water filter technology – household concrete design.

609 Medeiros, R.C., Daniel, L.A., 2018. Quantification and analysis of the viability of  
610 (oo)cysts of pathogenic protozoa in sewage sludge. Acta SciTechnol. 40, 1-6.  
611 <http://dx.doi.org/10.4025/actascitechnol.v40i1.28709>

612 Modal, P.K., Seth, R., Biswas, N., 2007. Performance evaluation of fabric aided slow  
613 sand filter in drinking water treatment. J Environ Eng Science 6, 703-712.  
614 <http://dx.doi.org/10.1139/S07-019>

615 Murphy, H.M., McBean, E.A., Farahbakhsh, K., 2010. A critical evaluation of two  
616 point-of-use water treatment technologies: can they provide water that meets  
617 WHO drinking water guidelines?. J Water Health 8, 611-630.  
618 <https://doi.org/10.2166/wh.2010.156>

619 Napotnik, J.A., Baker, D., Jellison, K.L., 2017. Effect of sand bed depth and medium  
620 age on *Escherichia coli* and turbidity removal in biosand filters. *Environ Sci*  
621 *Technol.* 51, 3402-3409. <https://doi.org/10.1021/acs.est.6b05113>

622 Palmateer, G., Manz, D., Jurkovic, A., McInnis, R., Unger, S., Kwan, K.K., Dutka, B.J.,  
623 1999. Toxicant and parasite challenge of Manz intermittent slow sand filter.  
624 *Environ Toxicol.* 14, 217-225. [https://doi.org/10.1002/\(SICI\)1522-](https://doi.org/10.1002/(SICI)1522-7278(199905)14:2<217::AID-TOX2>3.0.CO;2-L)  
625 [7278\(199905\)14:2<217::AID-TOX2>3.0.CO;2-L](https://doi.org/10.1002/(SICI)1522-7278(199905)14:2<217::AID-TOX2>3.0.CO;2-L)

626 Perez, E., Cardosi, J., Coombes, Y., Devine, J., Grossman, A., Kullmann, C., Kumar, C.  
627 A., Mukherjee, N., Prakash, M., Robiarto, A., Setiawan, D., Singh, U., Wartono,  
628 D., 2012. What does it take to scale up rural sanitation? *Water and Sanitation*  
629 *Program.* The World Bank, p. 47.

630 Sabogal-Paz, L.P., Campos, L.C., Bogush, A., Canales, M., 2020. Household slow sand  
631 filters in intermittent and continuous flows to treat water containing low mineral  
632 ion concentrations and Bisphenol A. *Sci Total Environ.* 702, 135078-135091.  
633 <https://doi.org/10.1016/j.scitotenv.2019.135078>

634 Sánchez, L.D., Sánchez, A., Galvis, G., Latorre, J., 2006. Multi-Stage Filtration.  
635 Thematic Overview Paper 15. IRC Interantional Water and Sanitation Centre,  
636 CINARA, Universidad del Valle, p.62.

637 Sánchez, L.D., Marin, L.M., Visscher, J.T., Rietveld, L.C., 2012. Low-cost multi-stage  
638 filtration enhanced by coagulation-flocculation in upflow gravel filtration. *Drink*  
639 *Water Eng Sci.* 5, 73-85. <https://doi.org/10.5194/dwes-5-73-2012>

640 Siqueira-Castro, I.C.V., Greinert-Goulart, J.A., Bonatti, T.B., Yamashiro, S., Franco,  
641 R.M.B., 2016. First report of predation of *Giardia* sp. cysts by ciliated protozoa  
642 and confirmation of predation of *Cryptosporidium* spp. oocysts by ciliate species.

643 Environ Sci Pollut Res. 23, 11357-11362. <https://doi.org/10.1007/s11356-016->  
644 6689-y

645 Speich, B., Croll, D., Furst, T., Utzinger, J., Keiser, J., 2016. Effect of sanitation and  
646 water treatment on intestinal protozoa infection: a systematic review and meta-  
647 analysis. Lancet Infect Dis. 16, 87-99. <https://doi.org/10.1016/S1473->  
648 3099(15)00349-7.

649 Souza Freitas, B.L., Sabogal-Paz, L., 2019. Pretreatment using *Opuntia cochenillifera*  
650 followed by household slow sand filters: technological alternatives for supplying  
651 isolated communities. Environ technol. 1-12.  
652 <https://doi.org/10.1080/09593330.2019.1582700>

653 Stauber, C.E., Elliott, M.A., Koksal, F., Ortiz, G.M., DiGiano, F.A., Sobsey, M.D.,  
654 2006. Characterisation of the biosand filter for *E. coli* reductions from household  
655 drinking water under controlled laboratory and field use conditions. Water Sci  
656 Technol. 54, 1-7. <https://doi.org/10.2166/wst.2006.440>

657 Terin, U.C., Sabogal-Paz, L.P., 2019. *Microcysts aeruginosa* and microcystin-LR  
658 removal by household slow sand filters operating in continuous and intermittent  
659 flows. Water Res. 150, 29-39. <https://doi.org/10.1016/j.watres.2018.11.055>

660 Tufenkji, N., Dixon, D.R., Considine, R., Drummond, C.J., 2006. Multi-scale  
661 *Cryptosporidium*/sand interactions in water treatment. Water Res. 40, 3315-3331.  
662 <https://doi.org/10.1016/j.watres.2006.07.036>

663 USEPA – US Environmental Protection Agency. 2012. Method 1623.1:  
664 *Cryptosporidium* and *Giardia* in water by filtration/IMS/FA. Office of Water.  
665 EPA/816/R-12/001.

666 Verma, S., Davarey, A., Sharma, A., 2017. Slow sand filtration for water and  
667 wastewater treatment – a review. *Environ Technol Rev.* 6, 47-58.  
668 <https://doi.org/10.1080/21622515.2016.1278278>

669 Visscher, J.T., 2006. Facilitating Community Water Supply treatment – From  
670 transferring filtration technology to multi-stakeholder learning. Thesis  
671 Wageningen Universiteit. ISBN: 90-8504-382-4, p. 254.

672 Wang, H., Narihiro, T., Straub, A.P., Pugh, C.R., Tamaki, H., Moor, J.F., Bradley, I.M.,  
673 Kamagata, Y., Liu, W., Nguyen, T.H., 2014. MS2 bacteriophage reduction and  
674 microbial communities in biosand filters. *Environ Sci Technol.* 48, 6702-6709.  
675 <https://doi.org/10.1021/es500494s>

676 World Health Organization (WHO), 2003. Domestic water quantity, service, level and  
677 health. WHO Document Production Services, Geneva, Switzerland.

678 World Health Organization (WHO), 2011. Evaluating household water treatment  
679 options: health-based targets and microbiological performance specifications.  
680 Geneva, Switzerland.

681 World Health Organization (WHO), 2014. Harmonized testing protocol: technology  
682 non-specific. WHO international scheme to evaluate household water treatment  
683 technologies. World Health Organization, Geneva, Switzerland.

684 World Health Organization (WHO) and United Nations Children’s Fund (UNICEF),  
685 2017. Progress on Drinking Water, Sanitation and Hygiene: 2017 update and SDG  
686 Baselines. Geneva, Switzerland.

687 World Health Organization (WHO), 2017. Guidelines for Drinking Water Quality:  
688 fourth edition incorporating the first addendum. World Health Organization,  
689 Geneva, Switzerland.

690 Young-Rojanschi, C., Madramootoo, C., 2014. Intermittent versus continuous operation  
691 of biosand filters. Water Res. 49, 1-10.  
692 <https://doi.org/10.1016/j.watres.2013.11.011>

accepted paper