



## A logical deduction based clause learning algorithm for Boolean satisfiability problems

Chen, Q. S., Xu, Y., Liu, J., & He, X. X. (2017). A logical deduction based clause learning algorithm for Boolean satisfiability problems. *International Journal of Computational Intelligent System*, 10(1), 824-834. Advance online publication. <https://doi.org/10.2991/ijcis.2017.10.1.55>

[Link to publication record in Ulster University Research Portal](#)

**Published in:**  
International Journal of Computational Intelligent System

**Publication Status:**  
Published online: 01/05/2017

**DOI:**  
[10.2991/ijcis.2017.10.1.55](https://doi.org/10.2991/ijcis.2017.10.1.55)

**Document Version**  
Author Accepted version

### **General rights**

The copyright and moral rights to the output are retained by the output author(s), unless otherwise stated by the document licence.

Unless otherwise stated, users are permitted to download a copy of the output for personal study or non-commercial research and are permitted to freely distribute the URL of the output. They are not permitted to alter, reproduce, distribute or make any commercial use of the output without obtaining the permission of the author(s).

If the document is licenced under Creative Commons, the rights of users of the documents can be found at <https://creativecommons.org/share-your-work/licenses/>.

### **Take down policy**

The Research Portal is Ulster University's institutional repository that provides access to Ulster's research outputs. Every effort has been made to ensure that content in the Research Portal does not infringe any person's rights, or applicable UK laws. If you discover content in the Research Portal that you believe breaches copyright or violates any law, please contact [pure-support@ulster.ac.uk](mailto:pure-support@ulster.ac.uk)

# A Logical Deduction Based Clause Learning Algorithm for Boolean Satisfiability Problems

Qingshan CHEN<sup>1</sup>, Yang XU<sup>2</sup>, Jun LIU<sup>3</sup>, Xingxing HE<sup>2</sup>

<sup>1</sup>School of Information Science and Technology, Southwest Jiaotong University,  
Chengdu, Sichuan 610031, China  
*qschen@home.swjtu.edu.cn*

<sup>2</sup>National-Local Joint Engineering Laboratory of System Credibility Automatic Verification,  
Southwest Jiaotong University, Chengdu, Sichuan 610031, China  
*xuyang@home.swjtu.edu.cn, x.he@home.swjtu.edu.cn*

<sup>3</sup>School of Computing and Mathematics, University of Ulster, Northern Ireland, UK  
*j.liu@ulster.ac.uk*

## Abstract

Clause learning is the key component of modern SAT solvers, while conflict analysis based on the implication graph is the mainstream technology to generate the learnt clauses. Whenever a clause in the clause database is falsified by the current variable assignments, the SAT solver will try to analyze the reason by using different cuts (i.e., the Unique Implication Points) on the implication graph. Those schemes reflect only the conflict on the current search subspace, does not reflect the inherent conflict directly involved in the rest space. In this paper, we propose a new advanced clause learning algorithm based on the conflict analysis and the logical deduction, which reconstructs a liner logical deduction by analyzing the relationship of different decision variables between the backjumping level and the current decision level. The logical deduction result is then added into the clause database as a newly learnt clause. The resulting implementation in Minisat improves the state-of-the-art performance in SAT solving.

**Keywords:** Boolean Satisfiability; SAT; Clause Learning; Logical Deduction; Implication Graph

## 1. Introduction

Boolean satisfiability (SAT) problem is the first NP-complete problem proven by Cook [2], many problems can be converted into the SAT problem solving. The corresponding SAT solvers are widely used in artificial intelligence, model checking, software verification,

integrated circuit verification, combinatorial optimization, and other fields. Over the last two decades, many heuristic algorithms for SAT solvers have been developed, such as clause learning [3,4,15], non-chronological backtracking [4], branching heuristic [4,6,19,20], restart [5,21,22], clause deleting [6,23], and so on. With the help of those algorithms, the modern SAT solvers can solve the problem with millions of clauses, and those algorithms also enhance the chances for the SAT solvers to be widely applied in industry.

Among the key technologies of SAT solvers, clause learning is the most important one. In the search procedure, whenever a new decision variable is chosen, the Boolean Constraint Propagation algorithm (BCP) can determine the values of a series of variables. If any clause in the clause database is falsified, the conflict analysis procedure will be triggered, and new learnt clauses are obtained by analyzing the implication graph [3] and added into the original problem. The learnt clauses often make other clauses become redundant, i.e., the learnt clauses can simplify the original problem, but also avoid the solver enter the same conflict search space again. Implication graph and other advanced researches on learning clauses, such as efficient implementation [7], minimizing learnt clauses [7], measuring the quality of learnt clause and subgraph [8,10], extending implication graph [9], and so on, have made a great breakthrough in the performance of the SAT solver.

However, the implication graph processing usually does not consider the relationship between different decision variables, but focuses on how to cut the implication graph and obtain the corresponding learnt clauses. Because the literals involved in the learnt clause cannot be assigned false at the same time, implication subgraph reflects only conflicts caused by the assigned variables, therefore it cannot fully reflect the potential conflicts in the rest graph. Jabbour [11] used learnt clause and original clause for resolution deduction, and the resolvent was added to the clause database as the new learnt clause and obtained a smaller backjumping level at the same time. The new learnt clause is not directly related to the current conflict. Although the potential conflicts seem to be processed, but sometimes it is hard to pinpoint the deep reasons of the conflict. In this paper, we use logical deductive method with a systematic study of the conflict analysis and clause learning. Whenever a conflict is reached, the solver begins to reconstruct a logical deduction by using decision variables between the backjumping level and the current decision level, and the results is then added to the original problem for further search. Experiments show that the proposed algorithm has significantly improved the frequency of restarts, conflicts and decision-making.

The rest of the paper is organized as follows. Section 2 provides some preliminaries including the main concepts used in the present work. Section 3 summarizes some traditional

learning schemes. Then a new approach using logical deduction for clause learning is proposed and detailed in Section 4. It is followed by the experimental case studies and results analysis in Section 5. Section 6 concludes the paper.

## 2. Preliminaries

### 2.1. SAT problem

A propositional formula  $\phi$  is represented in a Conjunctive Normal Form (CNF) which consists of a conjunction of clauses  $C$ ,  $\phi$  is true if and only if all of its clauses are true. A clause  $C$  consists of a disjunction of literals  $l$ ,  $C$  is true while one of its literals is true. A literal  $l$  is either a variable  $x$  or its negation  $\neg x$ , i.e., if  $x$  is assigned value true (1), then  $\neg x$  must be false (0), and vice versa. For example,  $\phi_0 = (\neg x_1 \vee x_3) \wedge (x_1 \vee x_2) \wedge (x_2 \vee \neg x_3 \vee x_5) \wedge (\neg x_2 \vee \neg x_4 \vee \neg x_5)$  is a CNF formula which contains 5 variables and 4 clauses.

The SAT problem is to decide whether there exists a truth assignment to all the variables such that the formula  $\phi$  becomes true. If exist, then  $\phi$  is satisfiable; otherwise  $\phi$  is unsatisfiable. For the formula  $\phi_0$ , the assignment  $X' = \{x_1 = 1, x_2 = 1, x_3 = 1, x_4 = 0\}$  makes it true, so  $\phi_0$  is satisfiable, we call  $X'$  is a satisfiable instance or interpretation of  $\phi_0$ .

### 2.2. CDCL framework

Conflict-Driven Clause Learning (CDCL) is based on the Davis–Putnam–Logemann–Loveland (DPLL) [12,13] algorithm, which is the most mainstream architecture of the modern SAT solver. Typical CDCL SAT solver algorithm [24] is shown in Algorithm 1. The SAT solver records an index for each decision level, which is denoted as *decisionlevel*, the *decisionlevel* starts from 0. Each variable in a CNF formula has a unique decision level, denoted as  $L_x$ . The search procedure will start by selecting an unassigned variable  $p$  and assume a value for it, at the same time, a new decision level will be starting, while the *decisionlevel* adds 1 by itself and the search space will jump to  $v \cup \{p\}$ .  $\text{BCP}(\phi, v)$  is the Boolean Constraint Propagation (BCP) procedure that consists of the iterated application of the unit clause rule. During these running procedures, a sequence of literals will be derived from it, and we call such variables propagated variables, denoted as  $V|_p$ , and  $L_p = L_{V|_p}$ .  $\text{Root}(x)$  is a function defined as the decision level where variable  $x$  belongs to, then

$Root(p) = p$ ,  $Root(V|_p) = p$ . If a conflict occurs in BCP  $(\phi, v)$ , i.e., any clause, either the initial clause or learnt clause, becomes an empty clause, then the procedure will analyze the reason of conflict, obtain a learnt clause and a backjumping decision level  $\beta$ . If  $\beta$  is 0, representing that the conflict occurs at the top level, then  $\phi$  is unsatisfiable; otherwise undo all assignments between  $\beta$  and the current decision level.

---

**Algorithm 1:** A typical CDCL framework.

---

**Input:** CNF formula  $\phi$ , assigned variables  $v$ .  
**Output:** the property of  $\phi$ .

```

1: decisionlevel  $\leftarrow$  0
2: if ( $BCP(\phi, v) == \text{CONFLICT}$ ) then                                 $\triangleright$  Boolean Constraint Propagation
3:   return UNSATISFIABLE
4: while (not AllVariableAssigned( $\phi, v$ ))
5:    $p \leftarrow \text{PickBranchingLit}(\phi, v)$                                  $\triangleright$  Start a new branch
6:   decisionlevel  $\leftarrow$  decisionlevel + 1
7:    $v \leftarrow v \cup \{p\}$ 
8:   if ( $BCP(\phi, v) == \text{CONFLICT}$ ) then
9:      $\beta = \text{ConflictAnalysis}(\phi, v)$ 
10:    if ( $\beta = 0$ ) then                                                 $\triangleright$  Conflict occurred at the root level
11:      return UNSATISFIABLE
12:    else
13:      BackTrack( $\phi, v, \beta$ )                                            $\triangleright$  Non-chronological backtracking
14:      decisionlevel  $\leftarrow$   $\beta$ 
15: return SATISFIABLE

```

---

In the subsequent sections we will review the clause learning method, resolution and implication graph, and how to analyze the conflict and obtain the learnt clause from an implication graph.

### 3. Clause learning

#### 3.1. Resolution

Resolution principle [14,16] is one of the most important methods for validating the unsatisfiability of logical formulas. Given two clauses  $C_1 = A \vee x$  and  $C_2 = B \vee \neg x$ , where  $x$  is a Boolean variable, then the clause  $R(C_1, C_2) = A \vee B$  can be inferred by the resolution rule, resolving on the variable  $x$ .  $R(C_1, C_2)$  is called the resolvent of  $C_1$  and  $C_2$ , both  $C_1$  and  $C_2$  is either a clause of original formula or the resolvent iteratively derived by using the resolution rule. If  $R(C_1, C_2)$  is an empty clause, then the original formula is unsatisfiable. The resolvent can be viewed as a learnt clause puts into the CNF formula, but it is not directly

derived from the conflict. In theory, the number of resolvents from a CNF formula is infinite, often requires amazing time and space complexity.

### 3.2. Implication Graph

CDCL based on implication graph [3] makes the scale of learnt clauses obvious smaller than the conventional resolution, and more targeted. The main idea of this method is as follows: whenever the conflict occurs, i.e., there exists at least one clause whose literals are all false, then analyze the implication graph and find the reason of conflict, and a new learnt clause represents the conflict is derived and added to the CNF formula.


The implication graph reflects the relationships of assigned variables during the SAT solver process. An implication graph is a directed acyclic graph (DAG). A typical implication graph is illustrated in Fig. 1, which is constructed as follows:

- **Vertex:** each vertex represents a variable assignment and its decision level, e.g., in Fig. 1,  $x_1(6)$  represents the variable  $x_1$  is assigned true at the decision level 6,  $\neg x_8(6)$  represents the variable  $x_8$  is assigned false at the decision level 6.
- **Directed edge:** the directed edge propagates from the antecedent vertices to the vertex  $q$  corresponding to the unit clause  $C_i$  that led to  $q$  assigned true, which will be labeled with  $C_i$ . Vertices have no incident edges corresponding to the decision variables. In Fig. 1,  $x_4$  and  $x_1$  are assigned false at the decision level 3 and 6, respectively, so  $C_1$  is a unit clause at the moment, its sole unassigned literal  $x_3$  must be assigned true for  $C_1$  to be satisfied. Therefore,  $\neg x_4(3)$  and  $\neg x_1(6)$  are the antecedent vertices of  $x_3(6)$ .
- **Conflict:** each variable corresponds to a unique vertex in the implication graph. A conflict occurs when there is a variable appears with positive and negative at the same time, such variable is referred to as the conflicting variable. In Fig. 1,  $x_2$  is the conflicting variable. In this case, the search procedure will be broken and the conflict analysis procedure will be invoked.
- **Unique Implication Point:** A Unique Implication Point<sup>2</sup> (UIP) is a vertex in an implication graph that dominates both positive and negative branches of the conflicting variable. In Fig. 1,  $x_9$  has played a dominant role for the conflict branches  $x_2$  and  $\neg x_2$ . Therefore,  $x_9$  is a UIP. From the conflicting variable, along the incident edge backtrack

to the current decision variable, UIPs are sorted in order as follows: called  $x_i$  the First UIP [3],  $x_j$  is the Last UIP.

- $C_1 = (\neg x_1 \vee \neg x_4 \vee x_3)$
- $C_2 = (\neg x_3 \vee \neg x_5)$
- $C_3 = (x_8 \vee x_5 \vee x_9)$
- $C_4 = (x_7 \vee \neg x_9)$
- $C_5 = (\neg x_7 \vee \neg x_{10} \vee x_{11})$
- $C_6 = (\neg x_6 \vee \neg x_7 \vee \neg x_{12})$
- $C_7 = (\neg x_3 \vee \neg x_8)$
- $C_8 = (x_2 \vee \neg x_{11} \vee x_{12})$
- $C_9 = (\neg x_2 \vee x_{12} \vee \neg x_{13})$
- $C_{10} = (x_6 \vee \neg x_9)$

Clause Database

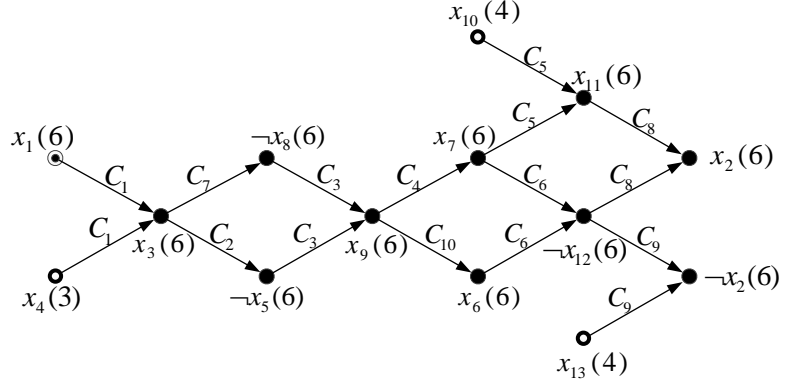

Implication Graph

Fig. 1. Clause database and implication graph.

### 3.3. Conflict Analysis and Learning

Conflict analysis aims to find the reasons of conflict; such conflict is not always caused by a unique variable assignment. As shown in Fig. 1, in addition to the variable  $x_1$  assigned true at the current decision level,  $x_4$ ,  $x_{10}$  and  $x_{13}$  are assigned true at the earlier decision level. Through the conflict analysis, we can construct a new clause  $C' = (\neg x_1 \vee \neg x_4 \vee \neg x_{10} \vee \neg x_{13})$  as a constraint clause and put it into the initial clause database, and backtrack to the biggest level except the current conflict level [15]. Whenever the variables  $x_4$ ,  $x_{10}$  and  $x_{13}$  are assigned true,  $x_1$  must be assigned false for  $C'$  to be satisfied, i.e., the SAT solver will not enter the conflict search space again.

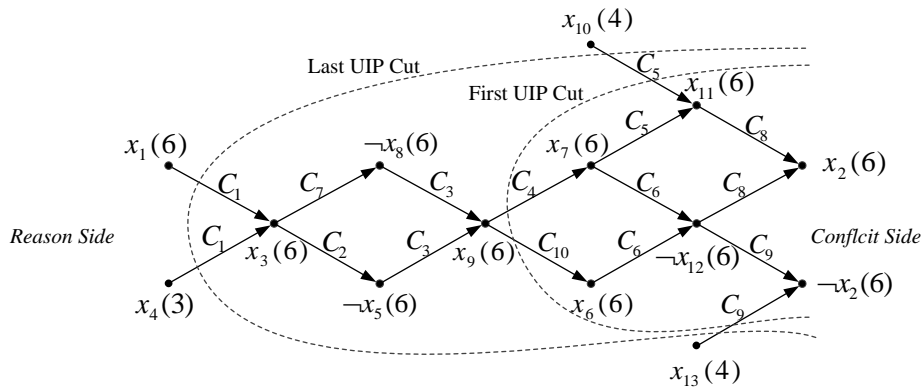


Fig. 2. Different cuts on an implication graph.

When the conflict occurs, different learnt clauses can be deduced from the implication

graph by different UIP cuts. The implication graph will be divided into two parts, that is, the conflict side and the reason side. The conflict side contains the conflict variables, and the reason side contains the variable which caused the conflict. Grasp [3] and Chaff [4] used the First UIP cut, as shown in Fig. 2, the first UIP splits the implication graph by the unique implication point  $x_9$ , the corresponding learnt clause  $C_{FirstUIP} = (\neg x_9 \vee \neg x_{10} \vee \neg x_{13})$  will be derived. Relsat [15] used the Last UIP cut schema, the corresponding learnt clause is  $C_{LastUIP} = (\neg x_1 \vee \neg x_4 \vee \neg x_{10} \vee \neg x_{13})$ , and backtrack to level 4.

Audemard [9] proposed an extension of the clause learning method called *inverse arcs*, which is directly derived from the satisfied clause. As shown in Fig. 1, for the clause  $C_1 = (\neg x_1 \vee \neg x_4 \vee x_3)$ ,  $x_1$  is assigned true at the current decision level,  $x_4$  is assigned true at the smaller decision level, such that  $x_3$  will be assigned true at the current decision level, both  $x_1$  and  $x_4$  are the antecedent variables of  $x_3$ . Assume that there exists a clause  $C' = (x_4 \vee \neg x_{14} \vee \neg x_3)$ ,  $x_3$  is assigned true at the level 2, the literal  $x_4$  assigned at the level 7 is implied by the two literals  $x_{14}$  and  $x_3$  respectively assigned at the levels 2 and 6. So the clause  $C'$  is an inverse arc, the new clause  $R(\dot{C}, C_{LastUIP}) = (\neg x_1 \vee \neg x_{10} \vee \neg x_{13} \vee \neg x_{14} \vee \neg x_3)$  is generated by resolution, then the search procedure will backtrack to the level 2, which is smaller than the previous value, i.e., the conflict can be found as early as possible.

From the above analysis,  $C_{FirstUIP}$ ,  $C_{LastUIP}$  and  $R(\dot{C}, C_{LastUIP})$  are different cuts and processes based on the current implication graph, the learnt clause is a constraint condition with part of a few variables. Although the inverse arc can derive a smaller backtracking level, but it usually requires amazing amount of calculation. The motivation behind the present work is to seek an advanced learning algorithm, making the backtracking level smaller, amounts of calculation fewer, and the optimization efficiency higher. In order to break through the limit of classical learning schemes, we have done some research on logical deduction [1], another automated reasoning method. Experiments show that the combination of implication graph and logical deduction is effective for some hard instances. Accordingly, in this paper, we propose an advanced learning algorithm based on the logical deduction. Through the analysis of correlation information between the decision variables at different decision levels, the proposed learning algorithm constructs the information constraints out of the implication graph, so as to guide the search process to avoid conflict as early as possible. The new learning algorithm is detailed in the following Section 4.



## 4. An Advanced Clause Learning Algorithm Using Logical deduction

### 4.1.Principle

In this section, we propose a new approach using logical deduction for clause learning, and the logical method we used is mainly base on the resolution principle and its variations. Due to its simplicity, as well as its soundness and completeness, resolution method has been adopted by the most popular modern theorem provers. For further improving the efficiency of resolution, many refined resolution methods have been proposed such as linear resolution, semantic resolution, and lock resolution, etc. In this paper we use the structure of linear resolution deduction as the logical deduction method, in which many clauses are involved in the deduction, only one resolvent is derived.

**Definition 4.1 [16,25]** Let  $C_1$  and  $C_2$  be clauses and  $L_1$  a propositional variable. Then the clause  $R(C_1, C_2, L_1) = C_1' \vee C_2'$  is called a resolvent of clauses  $C_1 = (L_1 \vee C_1')$  and  $C_2 = (\neg L_1 \vee C_2')$ .

**Definition 4.2 [25]** Let  $S$  be a clause set.  $\omega = \{C_1, C_2, \dots, C_k\}$  is called a resolution deduction from  $S$  to  $C_k$ , if  $C_i$  ( $i=1, \dots, k$ ) is either a clause in  $S$ , or the resolvent of  $C_j$  and  $C_r$  ( $j < i, r < i$ ).

**Definition 4.3 [25]** Let  $S$  be a clause set,  $C_0$  a clause in  $S$ . Then  $\omega = \{C_1, C_2, \dots, C_k\}$  is called a linear resolution deduction from  $S$  to  $C_k$  with the top clause  $C_0$  (shown in Fig. 3).

(1)  $C_{i+1}$  is the resolvent of  $C_i$  (a center clause) and  $B_i$  (a side clause), where  $i = 0, 1, \dots, k-1$ ;

(2)  $B_i \in S$ , or  $B_i = C_j$  ( $j < i$ ).




Fig. 3. Classical linear resolution

### 4.2.Extension

As shown in Fig. 3, the resolution process is pushed forward from top to bottom with top

clause  $C_0$ , any  $C_i (1 \leq i \leq k)$  can be viewed as a learnt clause. Observe that the classical linear resolution is merely theoretical, and there have three uncertain factors (or defects) that limit the computer implementation:

(1) **Uncertain Resolution Literal.** Each resolution literal  $l_i$  belongs to  $C_i$ , any literal in  $C_i$  can be selected as a resolution literal  $l_i$ . Different  $l_i$  may generates the different resolvent  $C_{i+1}$ .

(2) **Uncertain Side Clause.** Whenever a center clause  $C_i$  and its resolution literal  $l_i$  are determined, any clause (including original clause and resolvent) which contains  $\neg l_i$  can be selected as side clause, so the arbitrariness of choosing side clause is increased sharply while generating new resolvents.

(3) **Uncertain Depth.** Here, the *depth* is  $k$  which represents the number of center clauses. If the last center clause  $C_k$  is nonempty and resolution literal is not pure literal, then the resolution deduction will be extended sustainably. Therefore,  $k$  is uncertain.

In general, for a large-scale CNF formula, the resolvents are often grown exponentially with the depth of the solution. Therefore, in a logical deduction, which clause should be chosen and how many literals are involved, will make a lot of influences on the efficiency of solving. In response to these uncertain factors, we present some extended strategies of integrating with CDCL solver. The logical deduction process can be invoked at any time of the CDCL search procedure, restrictive strategies make the resolving process more controllable and easily realized.

(1) **Synchronized Clause Learning (SCL).** Linear logical deduction process synchronized with the CDCL clause learning. After the CDCL conflict analysis, a backtracking level is obtained, then we can reconstruct a linear resolution deduction between the backtracking level (also the root level) and the current decision level. Decision variables from the backtracking level to the current decision level are sequentially selected as the resolution literal. Our motivation is to prevent the resolution literals are arbitrarily selected. Further, the depth of resolution deduction is determined by backtracked level. Restrictive resolution literals and depth make the resolving process is controllable.

As an example illustrated in Fig. 4, assume that Fig. 4(a) is a partial sequence of variable assignments under the current conflict, where decision variables are grayed out and other variables behind the decision variable are implied variables under the corresponding decision assignments. When the conflict occurred at the current decision level 10, the backtracking

level is 7 according to the CDCL conflict analysis, then our algorithm is invoked. Decision variables from the backtracking level to the current decision level are  $x_3, x_{11}, x_5$  and  $x_{16}$  respectively. With those decision variables, we can reconstruct a logical resolution deduction and get a new clause completely different from the procedure via the implication graph. The reconstructed process is shown in Fig. 4(b), where  $C'_0, B'_0, B'_1, B'_2$  is part of  $C_0, B_0, B_1, B_2$ , respectively. The resolvent  $C_3 = (x_{16} \vee C'_0 \vee B'_0 \vee B'_1 \vee B'_2)$  can be added to the clause database as a new learnt clause. Moreover, we can reconstruct another logical deduction shown in Fig. 4(c). Notice that the center clause  $C_0$  and the side clauses  $B_0, B_1$ , and  $B_2$  are different from that shown in Fig. 4(b). Here, we add a tautology  $B_3 = (x_{16} \vee \neg x_{16})$  to the clause database. Then the resolvent  $C_4 = (\neg x_{16} \vee C'_0 \vee B'_0 \vee B'_1 \vee B'_2)$  is also a learnt clause, which contains the negation of the last decision variable  $x_{16}$  and similar to the traditional learnt clause by cutting the implication graph.

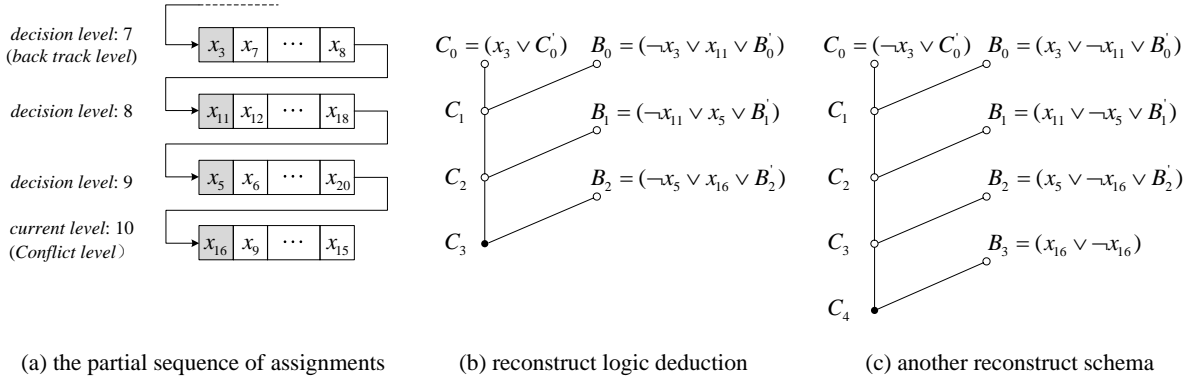


Fig. 4. The partial sequence of assignments under the current conflict and the reconstruct logical deduction by using those decision variables

(2) **Smaller Average Decision Level (SADL)**. For the side clause  $B_i$ , the average decision level excluding the unassigned literals should be as small as possible, and the number of unassigned literals must be as less as possible. There are two advantages for those selection strategies: one is the side clauses can be easily determined rather than randomly chosen, and therefore it can be seen as the conflict variables guided. The other and the most important is that, the smaller average decision level will cause the backtracking level smaller, i.e., the conflicts will occur as earlier as possible. On the other hand, the clauses with less unassigned literals are more likely unsatisfied, i.e., it is easier to become a unit clause or binary clause, hence it reduce the searching space more powerful.

(3) **Periodical Resolvent Deletion (PRD)**. In most cases the resolvents are grown exponentially, we need to construct automatic garbage collection that prevents memory overflow. It means, in short, the resolvents should be deleted periodically. However, it is not easy to estimate which one is best resolvent among those. Minisat [17] set an activity weight for each learnt clause. Whenever a learnt clause takes part in the conflict analysis, its activity is bumped. Inactive clauses are periodically removed. Glucose [23,26] compute the Literals Blocks Distance (LBD) for each learnt clause. A learnt clause is partitioned into  $n$  subsets according to the decision level of its literals, then all the learnt clauses with LBD greater than 2 are periodically deleted. Inspired by Minisat and Glucose, we propose a new weighted activity evaluation for each resolvent as follows:

**Definition 4.4 (Weighted Activity -WA)**. Let  $S$  be a clause set and  $\omega = \{C_1, C_2, \dots, C_k\}$  be a linear resolution deduction from  $S$  to  $C_k$  with the top clause  $C_0$ . The number of resolvent  $C_i$  that takes part in the conflict analysis is defined as  $H(C_i)$ . The average decision level (see (2)) of resolvent  $C_i$  is defined as  $L(C_i)$ . We define the weighted activity of  $C_i$  as

$$A(C_i) = \left( 1 - \frac{L(C_i)}{\max\{L(C)\}} \right) + \frac{H(C_i)}{\max\{H(C)\}}.$$

Whenever the solver needs to collect garbage, all the resolvents which  $A(C)$  is lower than a threshold will be removed. This evaluation method is easy to understand. A resolvent with smaller average decision level and used repeatedly analyze conflict is more likely to be preserved.

The new advanced algorithm is shown in Algorithm 2, Through many times deductions by recursively selected clause  $B_i$ , the resolvent  $C_{i+1}$  can be added to the original CNF formula, which will not change the truth-value of the formula.

---

**Algorithm 2:** The advanced clause learning by using the logical deduction.

---

**Input:** backtracking level  $backlevel$  after conflict analysis.

**Output:** a new learnt clause by a logical deduction.

```

1: while ( $backlevel < decisionlevel$ )      ▷  $decisionlevel$  : the current decision level.
2:    $i \leftarrow 0$ 
3:    $p = \text{trail}[Lastbacklevel]$           ▷ trail: the sequence of assigned variables.
4:    $q = \text{trail}[Lastbacklevel + 1]$ 
5:    $B_i = \text{getClause}(\neg p, q)$           ▷ Choose a clause which contains both  $\neg p$  and  $q$ .
6:   if ( $B_i$  is existing)
7:      $C'_{i+1} = R(C'_i, B_i)$           ▷ Use the resolution rule on  $p$  with  $C'_i$  and  $B_i$ .
8:   else
9:     break                            ▷ Stop deduction.
10:   $i \leftarrow i + 1$ 
11:   $backlevel \leftarrow backlevel + 1$ 
12: return  $C'_{i+1}$ 

```

---

### 4.3. Compare with First UIP Cut

Let's recall the example shown in Fig. 2, where the current decision level is 6. After a conflict occurs, a new learnt clause  $C_{LastUIP} = (\neg x_1 \vee \neg x_4 \vee \neg x_{10} \vee \neg x_{13})$  can be inferred from the implication graph by the Last UIP cut. Because  $L_{x_4} < L_{x_{10}} \leq L_{x_{13}} < L_{x_1}$ , the search procedure will get back to the second largest decision level 4. In this case, we can choose the smallest decision level  $L_{x_4} = 3$ . We start the logical deduction from the layer 3 to 6 (also starts from the root level). Assume that  $Root(\neg x_4) = x_{14}$  and  $Root(\neg x_{10}) = x_{15}$ , the decision variable of level 5 is  $x_{16}$ , there exist clauses  $C_{11} = (\neg x_4 \vee x_{14})$ ,  $C_{12} = (x_{15} \vee \neg x_{14} \vee \neg x_9)$ ,  $C_{13} = (\neg x_{15} \vee x_{16} \vee \neg x_{10})$ , and  $C_{14} = (\neg x_{16} \vee \neg x_9)$ , we can infer some clauses by the logical deduction:

$$C'_1 = R(C_{11}, C_{12}, x_{14}) = (\neg x_4 \vee x_{15} \vee \neg x_9),$$

$$C'_2 = R(C'_1, C_{13}, x_{15}) = (\neg x_4 \vee x_{16} \vee \neg x_9 \vee \neg x_{10}),$$

$$C'_3 = R(C'_2, C_{14}, x_{16}) = (\neg x_4 \vee \neg x_9 \vee \neg x_{10}).$$

Now we add  $C'_3$  to the original CNF formula as a new learnt clause. The variable  $x_8$  is assigned true at the level 6 is implied by the two variables  $x_4$  and  $x_{10}$  which are assigned true at the levels 3 and 4 respectively.  $x_8$  will inevitably become a conflict variable and earlier than  $x_2$ , the new implication graph is shown in Fig. 5.

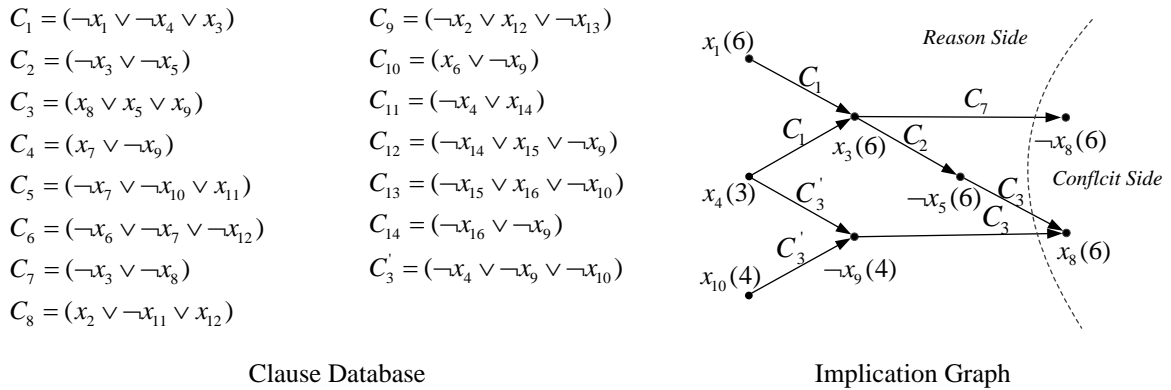


Fig. 5. The clause database and implication graph based on the logical deduction.

## 5. Experimental Results

In this section, we empirically compare the performance between the SAT solvers with and without using the logical deduction. Minisat [17] is the well-known SAT solver with the First

UIP, some state of the art SAT solvers such as Glucose [26], abcdSAT [27] and COMiniSatPS [28] are improved versions on the Minisat. So we have implemented the logical deduction with different *backlevel* in Minisat 2.2.0, called PSat\_b10 and PSat\_blc respectively with the *backlevel* 0 and the *backlevel* from the conflict analysis. This comparison is made on the set of 286 instances from the main track of SAT-Race 2015, with a time out of 3600s. We used a farm of Xeon 2.4Ghz E5 with 16G bytes physical memory, the operating system is Hat Enterprise Red 6.

Both Minisat 2.2.0 and PSat can successfully solve the instances without any preprocessors and all conclusions are correct. Minisat 2.2.0 solved 170 instances, PSat with *backlevel*=0 solved 193 instances, and PSat with *backlevel* from the conflict analysis solved 203 instances. For the satisfiable problems, PSat\_blc solves 20 more instances than Minisat. For the unsatisfiable problems, PSat\_blc solves 13 more instances than Minisat. Table 1 summarizes the number of instances solved for different benchmark families, where some families have been cleared from the table that all solvers have equal numbers of solved instances. The manthey family [18] is encoding of the Modulo game, a certain form of a combinatorial puzzle. We can see that our approach improves most obviously on the manthey family.

Table 1. Zoom on some solved families.

Family	Minisat 2.2.0			PSat_b10			PSat_blc		
	SAT	UNSAT	TOTAL	SAT	UNSAT	TOTAL	SAT	UNSAT	TOTAL
manthey	36	28	<b>64</b>	37	29	<b>66</b>	41	29	<b>70</b>
kgiraldezlevy	13	0	<b>13</b>	14	0	<b>14</b>	16	1	<b>17</b>
.xbits	12	0	<b>12</b>	17	0	<b>17</b>	17	0	<b>17</b>
atco	4	4	<b>8</b>	4	5	<b>9</b>	6	5	<b>11</b>
6sx	0	2	<b>2</b>	0	3	<b>3</b>	0	4	<b>4</b>
aaaix-planning	0	0	<b>0</b>	0	2	<b>2</b>	0	2	<b>2</b>
ACG	0	1	<b>1</b>	1	2	<b>3</b>	1	2	<b>3</b>
aes	2	0	<b>2</b>	1	0	<b>1</b>	4	0	<b>4</b>
AProVE	1	0	<b>1</b>	1	2	<b>3</b>	1	2	<b>3</b>
Group_mulr	0	0	<b>0</b>	0	1	<b>1</b>	0	1	<b>1</b>
gss	2	0	<b>2</b>	2	0	<b>2</b>	3	0	<b>3</b>
mrpp	20	12	<b>32</b>	21	12	<b>33</b>	20	12	<b>32</b>
partial	3	0	<b>3</b>	3	0	<b>3</b>	2	0	<b>2</b>
UCG	2	1	<b>3</b>	3	2	<b>5</b>	3	2	<b>5</b>
UR	0	0	<b>0</b>	1	0	<b>1</b>	1	0	<b>1</b>
UTI	0	0	<b>0</b>	1	0	<b>1</b>	1	0	<b>1</b>
countbitssr	0	0	<b>0</b>	0	1	<b>1</b>	0	1	<b>1</b>
vmpc	2	0	<b>2</b>	2	0	<b>2</b>	1	0	<b>1</b>

Table 2 shows the average time of Minisat, PSat\_b10 and PSat\_blc. As can be seen clearly, the logical deduction with the advanced clause learning method performs better than the original version no matter on SAT or UNSAT instances. For the satisfiable problems, Minisat

solved 114 instances with average time 715.6s, but PSat\_blc requires only 305.8s for 134 instances. This illustrates the learnt clauses from reconstructing logical deduction are more efficient because of avoiding the potential conflict searching space. Fig. 6 shows that both PSat\_b10 and PSat\_blc are more powerful than Minisat, where each dot corresponds to a SAT instance. Although the two versions of the PSat can improve the efficiency significantly, they behave differently, *backlevel* from conflict analysis is better than directly selecting the top level. The reason is that the logical deduction tends to spend more time, sometimes the learnt clauses have more literals while more clauses participates in the logical deduction and become redundant easily.

Table 2. The average time of different solvers.

Solver	Minisat 2.2.0			PSat_b10			PSat_blc		
	SAT	UNSAT	TOTAL	SAT	UNSAT	TOTAL	SAT	UNSAT	TOTAL
Solved instances	114	56	<b>170</b>	126	67	<b>193</b>	134	69	<b>203</b>
Total time(s)	81578	35629	<b>117207</b>	84372	42036	<b>126408</b>	40982	66164	<b>107146</b>
Average time(s)	715.6	636.2	<b>689.5</b>	669.6	627.4	<b>655.0</b>	305.8	958.9	<b>527.8</b>

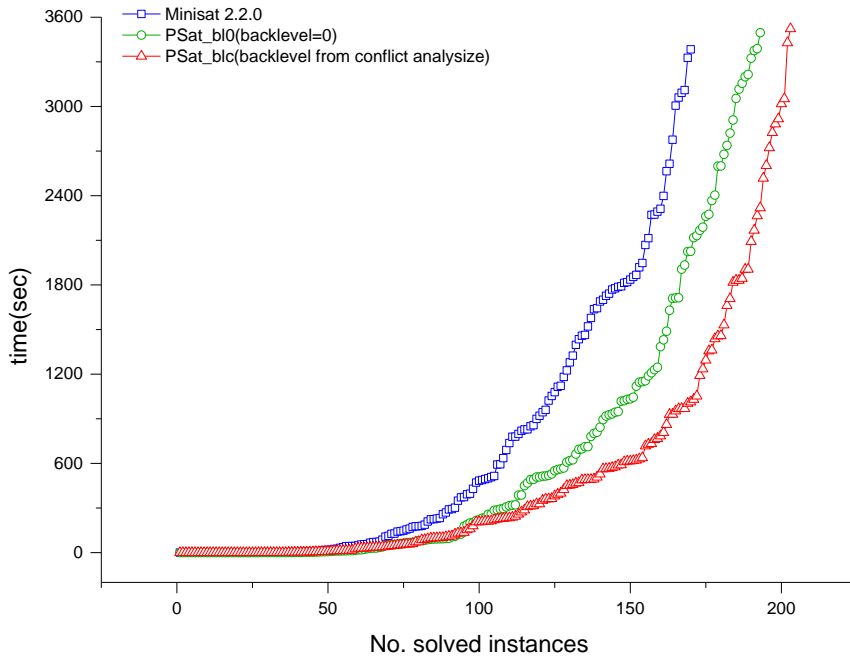


Fig. 6. Cactus plot of solvers with different clause learning schemas (2015 SAT-Race instances).

Fig. 7 shows the scatter plots that compare the Minisat and PSat in conflict times. Each plus in the plot corresponds to an instance, where the x-axis corresponds to the performance indexes solved by PSat and the y-axis corresponds to the performance indexes solved by Minisat. Instances that are upon the diagonal indicate PSat outperforms Minisat. Totally, 156 instances can be successfully solved by both Minisat and PSat. Among them, the number of conflicts for 97 instances solved by PSat are less than those for Minisat. It is shown that the

proposed advanced clause learning algorithm in this paper can efficiently avoid conflict search space, and therefore obtain the solution more quickly.

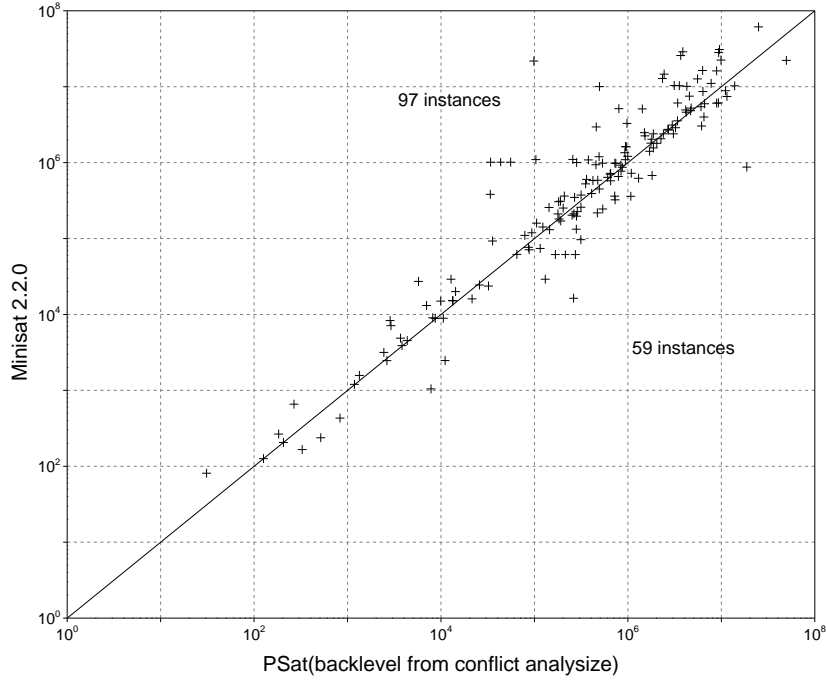


Fig. 7. Comparison of conflict times with and without the advanced learning on 156 instances.

## 6. Conclusions

In this paper, we have proposed an advanced learning algorithm for SAT problem. Whenever the SAT solver reaches a conflict, the advanced learning procedure will be triggered. A backjumping level is obtained by analyzing the implication graph. Through the iteratively logical deduction from the backjumping level to the current conflict level, a new learnt clause is obtained. The classic learning algorithms usually make the conflict occurs as early as possible, but easy to fall into a local optimum. As an extension of classic algorithms, our learnt clause contains more literals with smaller decision level, i.e. the possibility of SAT solver back-jump to the lower level will be bigger than before. We integrated the new algorithm into the state-of-the-art CDCL solver Minisat 2.2.0, experiments on the main track instances from SAT-Race 2015 showed that our algorithm has better performance. In future work, we plan to establish a detailed characterization system of clauses, in order to estimate clause of logical deduction, and obtain shorter resolvents.



## Acknowledgements

This work is partially supported by the National Natural Science Foundation of China (Grant No. 61673320, 11526171, 61305074), and the Fundamental Research Funds for the Central Universities of China (Grant No. A0920502051305-24, 2682015CX060).

## References

1. Q. Chen, Y. Xu, X. He, A heuristic Complete algorithm for sat problem by using logic deduction. In Proceedings of 12th International FLINS Conference, pp. 496-501 (2016)
2. S.A. Cook, The complexity of theorem-proving procedures. In: Proc. STOC 1971, ACM, pp. 151-158(1971)
3. J.P. Marques-Silva and K.A. Sakallah, GRASP: A new search algorithm for satisfiability. In: International Conference on Computer-Aided Design, pp. 220-227 (1996)
4. M. Moskewicz, C. Madigan, Y. Zhao, L. Zhang, and S. Malik, Chaff: Engineering an efficient SAT solver. In: Design Automation Conference, pp. 530-535 (2001)
5. C.P. Gomes, B. Selman, and H. Kautz, Boosting combinatorial search through randomization, In: National Conference on Artificial Intelligence, pp. 431-437 (1998)
6. E. Goldberg and Y. Novikov, BerkMin: a fast and robust SAT solver. In: Design, Automation and Testing in Europe Conference, pp. 142-149 (2002)
7. N. Sörensson and A. Biere, Minimizing learned clauses. In: Proceedings of the 12th international conference on theory and applications of satisfiability testing (SAT'09), LNCS 5584, pp. 237-243 (2009), Springer, Heidelberg(2009)
8. Y. Hamadi, S. Jabbour, and L. Sais. Learning for dynamic subsumption. In: Proceedings of the 21st IEEE international conference on tools with artificial intelligence (ICTAI'09), pp. 328-335 (2009)
9. G. Audemard, L. Bordeaux, Y. Hamadi, S. Jabbour, and L. Sais, A generalized framework for conflict analysis, In: Proceedings of the eleventh international conference on theory and applications of satisfiability testing (SAT'2008), LNCS 4996, pp. 21-27 (2008). Springer, Heidelberg(2008)
10. Z. Newsham, V. Ganesh, S. Fischmeister, G. Audemard, and L. Simon. Impact of community structure on SAT solver performance, In Under Submission (2014)
11. S. Jabbour. Learning for dynamic assignments reordering. In: 21st IEEE international conference on tools with artificial intelligence (ICTAI'2009), Newark, New Jersey, USA, pp.336-343 (2009)
12. M. Davis, H. Putnam, A computing procedure for quantification theory, CACM, pp. 201-215, 7(1960)
13. M. Davis, G. Logemann, and D. Loveland, A machine program for theorem proving, CACM, pp. 394-397, 5(1962)
14. J.A. Robinson, A machine-oriented logic based on the resolution principle. Journal of the ACM, pp. 23-411, 2(1965)

15. R.J.J. Bayardo, R.C. Schrag, Using CSP look-back techniques to solve real-world SAT instances. In: Proceedings of the fourteenth national conference on artificial intelligence (AAAI-97), pp. 203-208 (1997)
16. C.L. Chang and R.C. T. Lee, Symbolic logic and mechanical theorem proving. USA: Academic Press (1997)
17. N. Eén, N. Sörensson, An extensible SAT solver, In: Proceedings of the Sixth International Conference on Theory and Applications of Satisfiability Testing (SAT'03). LNCS, vol. 2919, pp. 502-518. Springer, Heidelberg (2004)
18. <http://baldur.iti.kit.edu/sat-race-2015/descriptions/bench/Modulo-HahnMantheyPhilipp.pdf>
19. A. Biere, A. Fröhlich, Evaluating CDCL variable scoring schemes. In: M. Heule, S. Weaver (eds.) SAT 2015. LNCS 9340, pp. 405-422. Springer, Heidelberg (2015)
20. J.H. Liang, V. Ganesh, P. Poupart, and K. Czarnecki, Learning Rate Based Branching Heuristic for SAT Solvers, In: N. Creignou and D. L. Berre (eds.) SAT 2016, LNCS 9710, pp. 123-140. Springer, Switzerland (2016)
21. J. Huang. The effect of restarts on the efficiency of clause learning. In: Proceedings of the 20th International Joint Conference on Artificial Intelligence (IJCAI 2007), Hyderabad, India, January 6-12, 2007, pp. 2318-2323 (2007)
22. A. Biere, Adaptive restart strategies for conflict driven SAT solvers. In H. K. Büning and X. Zhao, editors, Theory and Applications of Satisfiability Testing - SAT 2008, 11th International Conference, SAT 2008, volume 4996 of Lecture Notes in Computer Science, pp. 28-33 (2008)
23. G. Audemard, L. Simon, Predicting learnt clauses quality in modern SAT solvers. In C. Boutilier, editor, IJCAI, pp. 399-404 (2009)
24. J. Marques-Silva, I. Lynce, and S. Malik, Conflict-driven clause learning SAT solvers. In Handbook of Satisfiability. IOS Press (2009)
25. A.J.A. Robinson, and A. Voronkov, eds. Handbook of automated reasoning. Elsevier (2001)
26. G. Audemard, L. Simon, Glucose 2.3 in the SAT 2013 Competition. In: Proceedings of SAT Competition 2013, pp. 42-43 (2013)
27. J. Chen, A bit-encoding phase selection strategy for satisfiability solvers. In: Gopal, T.V., grawal, M., Li, A., Cooper, S.B. (eds.) TAMC 2014. LNCS, vol. 8402, pp. 158-167. Springer, Heidelberg (2014)
28. O. Chanseok, Patching minisat to deliver performance of modern sat solvers. In: SAT Race 2015 Solver and Benchmark Descriptions (2015)

Accept email.

-----Original Message-----  
From: Dr. Rosa Rodriguez - Editorial Office IJCIS  
[mailto:ijcis.office@atlantis-press.com]  
Sent: 17 March 2017 01:53  
To: Mr. Qingshan Chen <qschen@home.swjtu.edu.cn>  
Cc: Yang Xu <xuyang@home.swjtu.edu.cn>; Liu, Jun <j.liu@ulster.ac.uk>;  
Xingxing He <x.he@home.swjtu.edu.cn>  
Subject: [IJCIS-OA] Editor Decision - A Logical Deduction Based Clause  
Learning Algorithm for Boolean Satisfiability Problems

The following message is being delivered on behalf of IJCIS.

---

Mr. Qingshan Chen:

We have reached a decision regarding your submission to International Journal of Computational Intelligence Systems (OA), "A Logical Deduction Based Clause Learning Algorithm for Boolean Satisfiability Problems".

We are happy to announce that your article has been accepted for publication in IJCIS.

In order to facilitate a fast publication of your article, please read the instructions below carefully, so no delays will occur in publishing your article.

1) Please make sure that the article format is exactly as described in the author instructions of IJCIS. Please, keep the length of your article to at most 20 journal pages. More pages may result in publication delays. Also, please limit your bibliography to 50 references maximum (except for review papers).

LaTeX:

<http://www.atlantis-press.com/publications/journals/ap-journal-article-latex.zip>

Word:

<http://www.atlantis-press.com/publications/journals/ap-journal-article-word.zip>

2) Please make sure that you use the final version of your paper, including any corrections as suggested by the Editor and reviewers.

3) As your paper will be published as an Open Access paper, you will need to pay Article Processing Charges (APC) before the publication of your paper.

Please go to this page in order to make the payment:

<http://www.atlantis-press.com/publications/ijcis/ijcis-payment.html>

Please note that in case you are an editor of IJCIS or if you are a member of EUSFLAT, the publication fee is waived and your article will be published against no costs. For this, editors should send us an email ([ijcis@atlantis-press.com](mailto:ijcis@atlantis-press.com)) with the article ID and a request to have the APC waived. For EUSFLAT-members, please send us an email which includes the EUSFLAT-membership number and the article ID.

Once you have prepared the final files and received the confirmation of the APC-payment, please prepare an email to the publisher including the following:

- in the subject line: IJCIS-OA-ACCEPTED: the title of the article + the paper ID
- the submission date and the acceptance date of the article;
- name and email of the corresponding author;
- include both the source files (Word or LaTeX) and the PDF of the final version of your article;
- the confirmation message you received from Paypal after you made your payment (not needed for IJCIS editors or EUSFLAT members).

Only when we have received the above information we will prepare your article for publication, else the article may be DELAYED or even CANCELLED.

The email containing the final files should be sent ONLY to the following address:

[ijcis@atlantis-press.com](mailto:ijcis@atlantis-press.com)

Within 3 weeks after you submit this email and before publication of your article, you will receive a last proof for your approval. You should send the approval within TWO weeks to the address above.

Thank you very much,

Prof. Luis Martinez

Computer Sciences Department, University of Jaén, Jaén, Spain Phone +34953211902 Fax +34953212472 [martin@ujaen.es](mailto:martin@ujaen.es) This message was generated by the editorial system of the "International Journal of Computational Intelligence Systems"

<http://journals.sfu.ca/atlantis/index.php/IJCIS-OA>